

Signal Conditioning & *Communication Interfaces* *Product Catalog*

PERFORMANCE
MADE
SMARTER



TEMPERATURE | I.S. INTERFACES | COMMUNICATION INTERFACES | MULTIFUNCTIONAL | ISOLATION | DISPLAY

PR
electronics

Our purpose

is to create market-leading site standard solutions with high signal integrity and simplicity for our customers, concentrating on innovation in six core business areas: Temperature, I.S. Interfaces, Communication Interfaces, Multifunctional, Isolation and Display.

Our products are individually outstanding, but when our point-to-point temperature measurement devices, I.S. interfaces, backplanes, multifunctional signal devices and future-proof communication interfaces are combined, our solutions are truly unrivalled.

We will be


our customer's trusted partner for the best and most innovative signal conditioning solutions in the process and factory automation industries.

We provide

a wide range of benefits to our customers through innovative solutions and close collaboration:

- The highest signal integrity from your measurement point to control system
- Maximum uptime based on our Install and Forget® philosophy
- Easy and cost-effective deployment and monitoring with intuitive communication interfaces
- Site standard devices that are easily programmable to suit your specific application
- Day-to-day delivery

Since 1974, we have been dedicated to perfecting our core competence of innovating high precision technology with low power consumption. With a dedicated R&D center that is integrated with our lean production facility at our headquarters in Denmark, we are today one of the leading companies within signal conditioning.

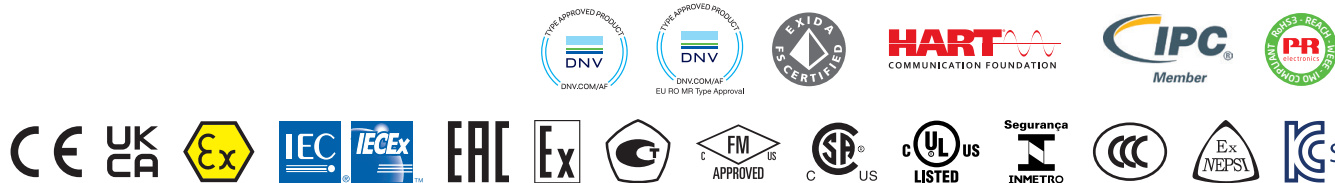

MULTIFUNCTIONAL TRANSMITTERS

3114 - 4104 - 4114 - 4116 - 4131 - 4179 - 4179B - 4184	4-5
5114A - 5115A - 5116A - 5131A - 9116A.....	6

FREQUENCY / PULSE

3202 - 3225 - 4222 - 4225.....	7
5202A - 5223A - 5225 - 9202A.....	8

ISOLATORS

3103 - 3104 - 3105 - 3108 - 3109.....	9
3117 - 3118 - 3185 - 3186.....	10
5104A - 5106A - 6185.....	11
9106A - 9107A - 9203A.....	12

TEMPERATURE TRANSMITTERS

3101 - 3102 - 3111 - 3112 - 3113.....	13
3331 - 3333 - 3337.....	14
5331A - 5332A - 5333A - 5334A	15
5335A - 5337A - 5343A - 5437A - 5450A.....	16
6331A - 6333A - 6334A - 6335A - 6337A.....	17
6437A - 7501 - 9113A.....	18

I.S. TEMPERATURE TRANSMITTERS

5331D - 5332D - 5333D - 5334B	19
5335D - 5337D - 5343B - 5437D - 5450D.....	20
6331B - 6333B - 6334B - 6335D - 6337D.....	21
6437D - 7501	22

I.S. INTERFACES

9106B - 9107B - 9113B - 9116B	23
9202B - 9203B.....	24
5104B-U9 - 5105B-U9 - 5106B-U9	25
5116B - 5131B.....	26
5202B - 5203B-U9.....	27

DISPLAYS

5531A - 5714 - 5715 - 5725	28
----------------------------------	----

I.S. DISPLAYS

5531B	29
-------------	----

POWER SUPPLIES

3405 - 9410 - 9421.....	30
-------------------------	----

SPECIAL PRODUCTS

2224 - 2261.....	31
------------------	----

BACKPLANE

.....	32
-------	----

SIGNAL TYPES

.....	32
-------	----

PROGRAMMING UNITS

4510 - 4511 - 4512 - 4590 - 5909.....	33
---------------------------------------	----

ACCESSORIES

.....	34-37
-------	-------

POWER RAIL

3000 power rail - 9000 power rail	38
---	----


ENVIRONMENTAL SPECIFICATIONS

.....	38
-------	----

ENCLOSURE SPECIFICATIONS

.....	38
-------	----

MULTIFUNCTIONAL TRANSMITTERS



TYPE

3114

4104

4114

4116






4131

INPUT:

RTD, TC, linear resistance, mV,
mA, V, potentiometer

OUTPUT:

mA, V, relays



INPUT:

mA, measurement range / min. span	0...23 mA / 16 mA	-23...+23 mA	0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA
V, measurement range / min. span	0...12 VDC / 0.8 V	-12...+12 VDC / 0.8 V	0...12 VDC / 0.8 V	0...12 VDC / 0.8 V	0...12 VDC / 0.8 V
RTD, measurement range / min. span	-200...+850°C / 25°C		-200...+850°C / -	-200...+850°C / -	-200...+850°C / -
Lin. R, measurement range / min. span	0...10000 Ω / -		0...10000 Ω / -	0...10000 Ω / -	0...10000 Ω / -
Potentiometer	10 Ω...100 kΩ		10 Ω...100 kΩ	10 Ω...100 kΩ	10 Ω...100 kΩ
Sensor connection, wires	2 - 3 - 4		2 - 3 - 4	2 - 3 - 4	2 - 3 - 4
TC types	BEJLNRSTUW3W5Lr		BEJLNRSTUW3W5Lr	BEJLNRSTUW3W5Lr	BEJLNRSTUW3W5Lr
Cold junction compensation	Internal		Internal / external	Internal / external	Internal / external
Reference voltage / 2-wire supply	- / > 15 V	- / 16 VDC	- / 16 VDC	- / 16 VDC	- / 16 VDC

OUTPUT:

mA, signal range / min. span	0...23 mA / 16 mA	-23...+23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA	
Load (@ current output)	≤ 600 Ω	≤ 800 Ω	≤ 800 Ω	≤ 800 Ω	
V, signal range / min. span	0...10 VDC / 0.8 VDC	-10...+10 VDC / 0.8 VDC	0...10 VDC / 0.8 VDC	0...10 VDC / 0.8 VDC	
Load (@ voltage output)	≥ 10 kΩ	≥ 500 kΩ			
Relays				2 x SPST, AC: 500 VA	2 x SPST, AC: 500 VA

TECHNICAL SPECIFICATIONS:

Ambient temperature	-25...+70°C	-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C
Supply voltage, universal AC / DC	- / 16.8...31.2 VDC	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V
Max. required power	1.2 W	2.5 W	2.0 W	2.5 W	2.0 W
Isolation voltage, test / operation	2.5 kVAC / 250 VAC	2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC
Response time	0.4 / 1.0 s	< 20 ms	< 400 ms	< 400 ms	< 400 ms
Signal dynamics, input / output	24 bit / 16 bit	20 bit / 18 bit	24 bit / 16 bit	24 bit / 16 bit	24 bit / -
Accuracy	< ±0.1% of span	< ±0.05% of span	< ±0.1% of span	< ±0.1% of span	< ±0.1% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C
NAMUR	NE21, NE43	NE21	NE21, NE43	NE21, NE43	NE21, NE43
Channels	1	1	1	1	1
Programming	4500 series devices	4500 series devices	4500 series devices	4500 series devices	4500 series devices

APPROVALS:

ATEX, Zone 2	✓				
IECEx, Zone 2	✓				
UKEX, Zone 2	✓				
FM, Zone 2 - DIV 2	✓	✓	✓	✓	✓
UL 61010 / 508	✓ / -	- / ✓	- / ✓	- / ✓	- / ✓
DNV / EU-RO marine	✓ / -	✓ / -	✓ / ✓	✓ / ✓	✓ / ✓
EAC	✓	✓	✓	✓	✓
SIL 2, Hardware Assessment			✓	✓	
CCC	✓				





APPLICATION GUIDE:

mA / V / temperature input	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Bipolar mA / V input		✓ / ✓			
Lin. R / potentiometer input	✓ / ✓		✓ / ✓	✓ / ✓	✓ / ✓
4...20 mA Tx input	✓	✓	✓	✓	✓
V-curve function		✓			
Buffered voltage output	✓				
Active / passive current output	✓ / -	✓ / ✓	✓ / -	✓ / -	
Analog / relay output	✓ / -	✓ / -	✓ / -	✓ / ✓	- / ✓
Custom sensor linearization					
Process signal calibration	✓	✓	✓	✓	✓
Power rail option	✓				



TYPE	4179	4179B	4184		
	Universal AC/DC transmitter	Universal trip amplifier	Universal uni-/bipolar signal transmitter		
INPUT:					
mV, mA, A, V, potentiometer					
OUTPUT:					
mA, V, relays					
INPUT:					
mA, measurement range / min. span			±100 mA / 0.5 mA		
A, measurement range / min. span	0...5 AAC / 0.5 AAC	0...5 AAC / 0.5 AAC			
V, measurement range / min. span	0...300 VAC / 0.5 VAC	0...300 VAC / 0.5 VAC	±300 VDC / 25 mV		
RTD, measurement range / min. span					
Lin. R, measurement range / min. span					
Potentiometer			0...100 %		
Reference voltage / 2-wire supply			2.5 V / 16 V		
3-wire supply			> 18...< 28 V		
OUTPUT:					
mA, signal range / min. span	-23...+23 mA / 16 mA		±23 mA / 4 mA		
Load (@ current output)	≤ 800 Ω		≤ 1000 Ω		
V, signal range / min. span	-10...+10 VDC / 0.8 VDC		-10...+10 VDC / 0.8 VDC		
Load (@ voltage output)	≥ 500 kΩ		≥ 500 kΩ		
Buffered voltage output			± 23 V		
Load, min. (buffered voltage output)			> 2 kΩ		
Relays		2 x SPST, AC: 500 VA			
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C		
Supply voltage, universal AC / DC	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V		
Max. required power	1.8 W	1.4 W	2.5 W		
Isolation voltage, test / operation	2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC		
Response time	< 0.75 s	< 0.75 s	< 20 ms		
Signal dynamics, input / output	20 bit / 18 bit	20 bit / -	24 bit / 18 bit		
Accuracy	< ±0.3% of span	< ±0.3% of span	< ±0.05% of span		
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C		
NAMUR	NE21, NE43	NE21, NE43	NE21, NE43		
Channels	1	1	1		
Programming	4500 series devices	4500 series devices	4500 series devices		
APPROVALS:					
ATEX, Zone 2					
IECEX, Zone 2					
FM, Zone 2 - DIV 2					
UL 61010 / 508	- / ✓	- / ✓	- / ✓		
DNV					
EAC					
SIL 2, Hardware Assessment	✓	✓	✓		
APPLICATION GUIDE:					
mA / V / temperature input	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -		
Bipolar mA / V input			✓ / ✓		
Lin. R / potentiometer input			- / ✓		
4...20 mA Tx input			✓		
V-curve function	✓		✓		
Buffered voltage output			✓		
Active / passive current output	✓ / ✓		✓ / ✓		
Analog / relay output	✓ / -	- / ✓	✓ / -		
Custom sensor linearization					
Process signal calibration	✓	✓	✓		
Power rail option					

MULTIFUNCTIONAL TRANSMITTERS



TYPE

5114A

5115A

5116A

5131A






9116A

INPUT:

RTD, TC, linear resistance, mV, mA, V, potentiometer

OUTPUT:

mA, V, relays



INPUT:

mA, measurement range / min. span	0...100 mA / 4 mA	0...100 mA / 4 mA	0...100 mA / 4 mA	0...100 mA / 4 mA	0...23 mA / 16 mA
V, measurement range / min. span	0...250 VDC / 5 mV	0...250 VDC / 5 mV	0...250 VDC / 5 mV	0...250 VDC / 5 mV	0...12 VDC / 0.8 V
mV, measurement range / min. span	-150...+150 mV / 5 mV	-150...+150 mV / 5 mV	-2500...+2500 mV / 5 mV	-150...+150 mV / 5 mV	
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 25°C
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	0...5000 Ω / 30 Ω	0...5000 Ω / 30 Ω	0...5000 Ω / 30 Ω	0...10000 Ω / -
Potentiometer	200 Ω...100 kΩ	200 Ω...100 kΩ	200 Ω...100 kΩ		10 Ω...10000 Ω
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4	2 - 3 - 4	2 - 3 - 4	2 - 3 - 4
TC types	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr
Max. offset	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	
Cold junction compensation	Internal / external	Internal / external	Internal / external	Internal / external	Internal / external
Reference voltage / 2-wire supply	2.5 VDC / > 17.1 VDC	2.5 VDC / > 17.1 VDC	2.5 VDC / > 16.5 VDC		- / > 16.5 VDC
OUTPUT:					
mA, signal range / min. span	0...23 mA / 10 mA	0...23 mA / 10 mA	0...23 mA / 10 mA	3.5...23 mA / 10 mA	0...23 mA / 16 mA
Load (@ current output)	≤ 600 Ω	≤ 600 Ω	≤ 600 Ω	≤ (V _{supply} -7.5)/0.023 [Ω]	≤ 600 Ω
V, signal range / min. span	0...10 VDC / 0.5 VDC	0...10 VDC / 0.5 VDC	0...10 VDC / 0.5 VDC		
Load (@ voltage output)	≥ 500 kΩ	≥ 500 kΩ	≥ 500 kΩ		
Relays			2 x SPST, AC: 500 VA		1 x SPST, AC: 500 VA
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C
Supply voltage, universal AC / DC	21.6...253 V / 19.2...300 V	21.6...253 V / 19.2...300 V	21.6...253 V / 19.2...300 V	- / 7.5...35 VDC	- / 19.2...31.2 VDC
Max. required power, 1 / 2 channels	2.1 W / 2.8 W	2.1 W / 2.8 W	2.4 W / -	0.8 W	≤ 2.1 W
Isolation voltage, test / operation	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC	2.6 kVAC / 250 VAC
Response time	250 ms...60 s	250 ms...60 s	250 ms...60 s	1...60 s	0.4 / 1...60 s
Signal dynamics, input / output	22 bit / 16 bit	22 bit / 16 bit	22 bit / 16 bit	22 bit / 16 bit	24 bit / 16 bit
Accuracy	< ±0.05% of span	< ±0.05% of span	< ±0.05% of span	≤ ±0.05% of span	< ±0.1% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C
NAMUR	NE21, NE43	NE21, NE43	NE21, NE43	NE21, NE43	NE21, NE43
Channels	1 or 2	2	1	1 or 2	1
Programming	5909 + DIP-switch	5909 + DIP-switch	5909	5909 + DIP-switch	4500 series devices


APPROVALS:

ATEX, Zone 2				✓	✓
IECEx, Zone 2				✓	✓
UKEX, Zone 2					✓
FM, Zone 2 - DIV 2					✓
INMETRO, Zone 2					✓
UL 61010 / 508 / 913			- / ✓ / -		✓ / - / ✓
DNV	✓	✓	✓		✓
EAC	✓	✓	✓	✓	✓
SIL 2 Full Assessment IEC 61508					✓
CCC / KCs					✓ / ✓

APPLICATION GUIDE:

mA / V / temperature input	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Bipolar mV input	✓	✓		✓	
Lin. R / potentiometer input	✓ / ✓	✓ / ✓	✓ / ✓	✓ / -	✓ / ✓
4...20 mA Tx input	✓	✓	✓	✓	✓
Dual input - math functions		✓			
Buffered voltage output					
Active / passive current output	✓ / ✓	✓ / ✓	✓ / ✓	✓	✓ / ✓
Analog / relay output	✓ / -	✓ / -	✓ / ✓	✓ / -	✓ / ✓
Custom sensor linearization	✓	✓	✓		
Process signal calibration	✓	✓	✓	✓	✓
Power rail option					✓




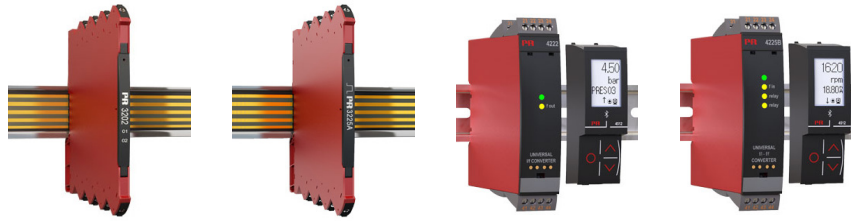


TYPE	3202	3225	4222	4225	
	Pulse isolator / switch amplifier	Universal frequency converter	Universal I/f converter	Universal f/I-f/f converter	
INPUT:					
Frequency, pulse, V, mA, Pt100, TC, mV					
OUTPUT:					
mA, V, pulse, relays					
INPUT:					
Sensor type	NAMUR / NPN / switch	All standard sensors $\square$		All standard sensors $\square$	
Hz, measurement range / min. span	0...5 kHz	0...100 kHz / 0.001 Hz		0...100 kHz / 0.001 Hz	
Min. pulse width	> 100 μ s	4 μ s		4 μ s	
mA, measurement range / min. span			0...23 mA / 16 mA		
V, measurement range / min. span			0...12 VDC		
RTD, measurement range / min. span			200...+850°C / -		
Lin. R, measurement range / pot.-meter			0 Ω ...10 k Ω / 10 Ω ...100 k Ω		
Sensor connection, wires			2 - 3 - 4		
TC types			BEJLNRSTUW3W5Lr		
OUTPUT:					
mA, signal range / min. span		0...23 mA / 16 mA		0...23 mA / 16 mA	
V, signal range / min. span		0...11.5 VDC / 0.8 VDC		0...11.5 VDC / 4 VDC	
Hz, signal range / min. span			0...25000 Hz / 0.001 Hz	0.001 Hz...100 kHz / 0.001 Hz	
Pulse output	NPN / relay		NPN / PNP / TTL	NPN / PNP (4225C)	
Relays	2 x SPST, AC: 100 VA	1 (3225B)		1 (4225A) / 2 (4225B)	
Max. output frequency	5 kHz		25 kHz	100 kHz	
Sensor supply	8.2 VDC	5...17 VDC	> 16 VDC	5...17 VDC	
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-25...+70°C	-25...+70°C	-20...+60°C	-20...+60	
Supply voltage, AC / DC	- / 16.8...31.2 VDC	- / 16.8...31.2 VDC	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	
Max. required power, 1 / 2 channels	1.2 W / -	1.2 W	2.5 W / -	2.6 W	
Isolation voltage, test / operation	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC	
Response time	< 20 ms	< 30 ms	< 1 s	< 30 ms	
Signal dynamics, input / output		- / 18 bit	24 bit / -	- / 18 bit	
Accuracy		< 0.06% of span	$\leq \pm 0.1\%$ of span	< 0.06% of span	
Temperature coefficient		0.006% / °C	< $\pm 0.01\%$ of span / °C	0.006% / °C	
NAMUR	NE21, NE44	NE21, NE43	NE21	NE21, NE43	
Channels	1	1	1	1	
Programming	DIP-switch	DIP-switch, PR 4590	4500 series devices	4500 series devices	

APPROVALS:					
ATEX, Zone 2	✓	✓			
IECEX, Zone 2	✓	✓			
UKEX, Zone 2	✓	✓			
FM, Zone 2 - DIV 2	✓		✓		
UL 61010 / 508 / 913	✓ / - / -	✓ / - / -	- / ✓ / -	- / ✓ / -	
DNV					
EAC			✓		
SIL 2, Hardware Assessment				✓	
SIL 2 Full Assessment IEC 61508					
CCC	✓	✓			

APPLICATION GUIDE:					
Frequency to analog converter		✓		✓	
Analog to frequency converter			✓		
Lin. R / potentiometer input			✓ / ✓		
Concurrent f/I and f/f					
Pulse converter / scaler					
Pulse isolator 1:1 / splitter	✓ / ✓				
Dual input - math functions					
Digital output	✓		✓	✓	
Relay output	✓	✓		✓	
Process signal calibration		✓	✓	✓	
Power rail option	✓	✓			

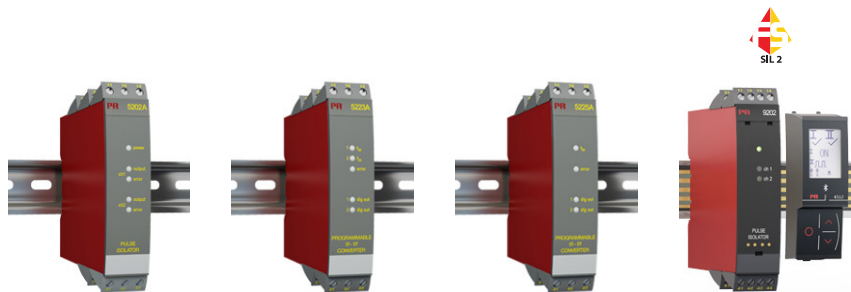


TYPE	5202A	5223A	5225A	9202A	
Pulse isolator	Programmable f/I - f/f converter	Programmable f/I - f/f converter	Pulse isolator		
INPUT: Frequency, pulse					
OUTPUT: mA, V, pulse, relays					
INPUT:					
Sensor type	NAMUR / switch	All standard sensors $\square$	All standard sensors $\square$	NAMUR / switch	
Hz, measurement range / min. span	0...5 kHz	0...20 kHz / 0.001 Hz	0...20 kHz / 0.001 Hz	0...5 kHz	
Min. pulse width	> 100 μ s	25 μ s	25 μ s	> 100 μ s	
OUTPUT:					
mA, signal range / min. span		0...23 mA / 5 mA	0...23 mA / 5 mA		
V, signal range / min. span		0...10 VDC / 0.25 VDC	0...10 VDC / 0.25 VDC		
Hz, signal range / min. span	0...5 kHz / -			0...5 kHz	
Pulse output	NPN / relay	NPN / PNP or relays	NPN / PNP or relays	NPN / relay	
Relays	2 x SPDT, AC: 100 VA	2 x SPST, AC: 500 VA	2 x SPST, AC: 500 VA	1 x SPST, AC: 500 VA	
Max. output frequency		1000 Hz	1000 Hz		
Sensor supply		5...17 VDC	5...17 VDC		
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C	
Supply voltage, AC / DC	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	- / 19.2...28.8 VDC	- / 19.2...31.2 VDC	
Max. required power, 1 / 2 channels	- / 1.5 W or 1.8 W*	3 W	3.5 W	$\leq 1.1...1.3$ W / $\leq 1.5...1.9$ W	
Isolation voltage, test / operation	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC	2.6 kVAC / 250 VAC	
Response time		60 ms...1000 s	60 ms...1000 s	200 ms	
Signal dynamics, input / output		- / 16 bit	- / 16 bit		
Accuracy		$\leq \pm 0.1\%$ of span	$\leq \pm 0.1\%$ of span		
Temperature coefficient		$< \pm 0.01\%$ of span / °C	$< \pm 0.01\%$ of span / °C		
NAMUR	NE21			NE21	
Channels	2	1	1	1 or 2	
Programming	DIP-switch	5909 + DIP-switch	5909 + DIP-switch	4500 series devices	
APPROVALS:					
ATEX, Zone 2 / UKEX, Zone 2	✓ / -			✓ / ✓	
IECEX, Zone 2	✓			✓	
FM, Zone 2 - DIV 2				✓	
INMETRO, Zone 2				✓	
UL 61010 / 508 / 913	- / ✓ / -			✓ / - / ✓	
DNV				✓	
EAC	✓	✓	✓	✓	
SIL 2, Hardware Assessment				✓	
SIL 2 Full Assessment IEC 61508				✓	
CCC / KCs				✓ / ✓	
APPLICATION GUIDE:					
Frequency to analog converter		✓	✓		
Analog to frequency converter					
Lin. R / potentiometer input					
Concurrent f/I and f/f			✓		
Pulse converter / scaler		✓	✓		
Pulse isolator 1:1				✓	
Dual input - math functions	✓	✓			
Digital output		✓	✓	✓	
Relay output	✓	✓	✓	✓	
Process signal calibration	✓	✓	✓		
Power rail option				✓	

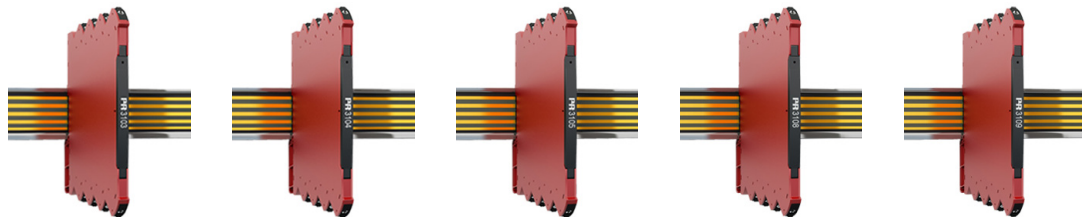

TYPE	3103	3104	3105	3108	3109
	Isolated repeater	Isolated converter	Isolated converter	Isolated repeater / splitter	Isolated converter / splitter
INPUT:					
mA, V, potentiometer					
OUTPUT:					
mA, V					
INPUT:					
mA, measurement range / min. span	0...23 mA / 1:1	0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 1:1	0...23 mA / 16 mA
V, measurement range / min. span		0...10.25 VDC / 4 VDC	0...10.25 VDC / 4 VDC		0...10.25 VDC / 4 VDC
Reference voltage / 2-wire supply		- / > 17 V			- / > 17 V
OUTPUT:					
mA, signal range / min. span	0...23 mA / 1:1	0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 1:1	0...23 mA / 16 mA
Load (@ current output)	≤ 600 Ω	≤ 600 Ω	≤ 600 Ω	≤ 300 Ω per channel	≤ 300 Ω per channel
V, signal range / min. span		0...10 VDC / 4 VDC	0...10 VDC / 4 VDC		0...10 VDC / 4 VDC
Load (@ voltage output)		≥ 10 kΩ	≥ 10 kΩ		≥ 10 kΩ
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-25...+70°C	-25...+70°C	0...+70°C	-25...+70°C	-25...+70°C
Supply voltage, AC / DC	- / 16.8...31.2 VDC	- / 16.8...31.2 VDC	- / 16.8...31.2 VDC	- / 16.8...31.2 VDC	- / 16.8...31.2 VDC
Max. required power*	0.65 W	1.2 W	0.8 W	0.75 W	1.2 W
Isolation voltage, test / operation	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC
Response time	< 7 ms	< 7 ms	< 7 ms	< 7 ms	< 7 ms
Signal dynamics, input / output	Analog signal chain	Analog signal chain	Analog signal chain	Analog signal chain	Analog signal chain
Accuracy	< ±0.05% of span	< ±0.05% of span	< ±0.2% of span	< ±0.05% of span	< ±0.05% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.015% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C
NAMUR	NE21	NE21	NE21	NE21	NE21
Channels	1	1	1	1	1
Programming	No	DIP-switch	DIP-switch	No	DIP-switch
APPROVALS:					
ATEX, Zone 2	✓	✓		✓	✓
IECEx, Zone 2	✓	✓		✓	✓
UKEX, Zone 2	✓	✓		✓	✓
FM, Zone 2 - DIV 2	✓	✓		✓	✓
UL 61010 / 508	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
DNV	✓	✓	✓	✓	✓
EAC	✓	✓	✓	✓	✓
CCC	✓	✓		✓	✓
APPLICATION GUIDE:					
Signal repeater	✓			✓	
Signal converter		✓	✓		✓
Signal splitter				✓	✓
mA / V bipolar input					
4...20 mA Tx input		✓			✓
Buffered voltage output		✓	✓		✓
mA / V output	✓ / -	✓ / ✓	✓ / ✓	✓ / -	✓ / ✓
Active / passive mA output	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
Mounting in Zone 2 / Div 2	✓	✓	✓	✓	✓
Power rail option	✓	✓	✓	✓	✓

* = @ 24 VDC


Of span = Of the presently selected range



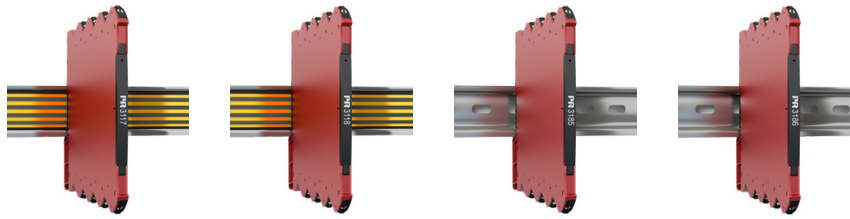


TYPE	3117	3118	3185	3186	
	Bipolar isolated converter	Bipolar isolated converter / splitter	Loop-powered isolator	2-wire transmitter isolator	
INPUT: mA, V, potentiometer OUTPUT: mA, V					
INPUT:					
mA, measurement range / min. span	-23...+23 mA	-23...+23 mA	0...23 mA / 1:1	3.5...23 mA / 1:1	
V, measurement range / min. span	±5 and ±10 VDC	±5 and ±10 VDC		- / V _{loop} -2.5 VDC	
Reference voltage / 2-wire supply					
OUTPUT:					
mA, signal range / min. span	0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 1:1	3.5...23 mA / 1:1	
Load (@ current output)	≤ 600 Ω	≤ 300 Ω per channel	≤ 600 Ω		
V, signal range / min. span	0...10 VDC / 4 VDC	0...10 VDC / 4 VDC			
Load (@ voltage output)	≥ 10 kΩ	≥ 10 kΩ			
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-25...+70°C	-25...+70°C	-25...+70°C	-25...+70°C	
Supply voltage, AC / DC	- / 16.8...31.2 VDC	- / 16.8...31.2 VDC	≤ 1.25 V + (0.015 × V _{out})	- / 6...35 VDC	
Max. required power	*0.8 W	*0.8 W	30 mW per channel	50 mW per channel	
Isolation voltage, test / operation	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	
Response time	< 7 ms	< 7 ms	< 5 ms	< 5 ms	
Signal dynamics, input / output	Analog signal chain	Analog signal chain	Analog signal chain	Analog signal chain	
Accuracy	< ±0.05% of span	< ±0.05% of span	< ±0.1% of span	< ±0.05% of span	
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	
NAMUR	NE21	NE21	NE21	NE21	
Channels	1	1	1 or 2	1 or 2	
Programming	DIP-switch	DIP-switch	No	No	
APPROVALS:					
ATEX, Zone 2	✓	✓	✓	✓	
IECEx, Zone 2	✓	✓	✓	✓	
UKEX, Zone 2	✓	✓	✓	✓	
FM, Zone 2 - DIV 2	✓	✓	✓	✓	
UL 61010 / 508	✓ / -	✓ / -	✓ / -	✓ / -	
DNV	✓	✓	✓	✓	
EAC	✓	✓	✓	✓	
CCC	✓	✓	✓	✓	
APPLICATION GUIDE:					
Signal repeater			✓	✓	
Signal converter	✓	✓			
Signal splitter		✓			
mA / V bipolar input	✓	✓ / ✓			
4...20 mA Tx input				✓	
Buffered voltage output	✓	✓			
Active / passive input signal			✓ / -	✓ / ✓	
mA / V output	✓ / ✓	✓ / ✓	✓ / -	✓ / -	
Active / passive mA output	✓ / -	✓ / -	✓ / -	- / ✓	
Mounting in Zone 2 / Div 2	✓	✓	✓	✓	
Power rail option	✓	✓			

* = @ 24 VDC

Of span = Of the presently selected range

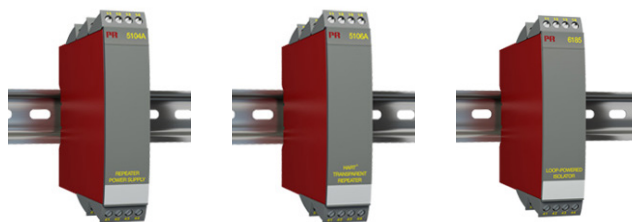

TYPE	5104A	5106A	6185		
	Repeater / power supply	HART transparent repeater	Loop-powered isolator		
INPUT:					
mA, mV, V,					
HART transparent					
OUTPUT:					
mA, V,					
HART transparent					
					
INPUT:					
mA, measurement range / min. span	0...23 mA / 16 mA	3.5...23 mA / 1:1	0...23 mA / 1:1		
V, measurement range / min. span	0...10 VDC / 8 VDC				
Max. offset	20% of selec. max. value				
Reference voltage / 2-wire supply	- / > 17.1 VDC	- / > 17 VDC			
OUTPUT:					
mA, signal range / min. span	0...23 mA / 16 mA	3.5...23 mA / 1:1	0...23 mA / 1:1		
Load (@ current output)	≤ 600 Ω	≤ 600 Ω	≤ 600 Ω		
V, signal range / min. span	0...10 VDC / 0.8 VDC				
Load (@ voltage output)	≥ 500 kΩ				
Max. offset	20% of selec. max. value				
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C		
Supply voltage, AC / DC	21.6...253 V / 19.2...300 V	21.6...253 V / 19.2...300 V	- / ≤ 1.8 VDC		
Max. required power, 1 / 2 channels	2.0 W / 2.8 W	2.0 W / 2.8 W	40 mW per channel		
Isolation voltage, test / operation	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC	2 kVAC / -		
Response time	< 25 ms	< 25 ms	< 4 ms		
Signal dynamics, input / output	Analog signal chain	Analog signal chain	Analog signal chain		
Accuracy	≤ ±0.1% of span	≤ ±0.1% of span	≤ ±0.1% of span		
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C		
NAMUR	NE21	NE21			
Channels	1 or 2	1 or 2	1, 2 or 4		
Programming	DIP-switch	No	No		
APPROVALS:					
ATEX, Zone 2					
IECEX, Zone 2					
FM, Zone 2 - DIV 2					
UL 61010 / 508	- / ✓	- / ✓			
DNV	✓				
EAC	✓	✓	✓		
APPLICATION GUIDE:					
Signal repeater		✓	✓		
Signal converter	✓				
Signal splitter					
mA / V bipolar input					
4...20 mA Tx input	✓	✓			
Buffered voltage output					
Active / passive input signal			✓ / -		
mA / V output	✓ / ✓	✓ / -	✓ / -		
Active / passive mA output	✓ / ✓	✓ / ✓	✓ / -		
Mounting in Zone 2 / Div 2					
Power rail option					

ISOLATORS



TYPE

9106A

9107A




9203A

INPUT:

mA, HART communication

OUTPUT:

mA,
HART communication



INPUT:

mA, measurement range / min. span
V, measurement range / min. span
Max. offset
Reference voltage / 2-wire supply
Sensor type

3.5...23 mA / 16 mA

3.5 ...23 mA / 16 mA

NPN / PNP / switch

OUTPUT:

mA, signal range / min. span
Pulse output

3.5...23 mA / 16 mA

3.5...23 mA / 16 mA

Valves etc.

TECHNICAL SPECIFICATIONS:

Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C
Supply voltage, AC / DC	- / 19.2...31.2 VDC	19.2...31.2 VDC	19.2...31.2 VDC
Max. required power, 1 / 2 channels	≤ 1.1 W / ≤ 1.9 W	≤ 1.0 W / ≤ 1.8 W	≤ 1.9...2.5 W / ≤ 3.1 W
Isolation voltage, test / operation	2.6 kVAC / 250 VAC	2.6 kVAC / 250 VAC	2.6 kVAC / 250 VAC
Response time	< 5 ms	< 5 ms	< 10 ms
Signal dynamics,input	Analog signal chain	Analog signal chain	
Accuracy	≤ ±16 µA	< ±16 µA	
Temperature coefficient	≤ ±1.6 µA / °C	< ±0.01% of span / °C	
NAMUR	NE21	NE21	NE21
Channels	1 or 2	1 or 2	1 or 2
Programming	4500 series devices	4500 series devices	4500 series devices


APPROVALS:

ATEX, Zone 2	✓	✓	✓
IECEx, Zone 2	✓	✓	✓
UKEX, Zone 2	✓	✓	✓
FM, Zone 2 - DIV 2	✓	✓	✓
INMETRO, Zone 2	✓	✓	✓
UL 61010 / 913	✓ / ✓	✓ / ✓	✓ / ✓
DNV	✓	✓	✓
EAC	✓	✓	✓
SIL 2/3 Full Assessment IEC 61508	✓	✓	✓
CCC / KCs	✓ / ✓	✓ / ✓	✓ / ✓

APPLICATION GUIDE:


Signal repeater	✓		
Signal driver		✓	
Signal splitter	✓		
Solenoid / alarm driver			✓
mA input	✓	✓	
4...20 mA Tx input	✓		
Active / passive mA output	✓ / ✓	✓ / -	
HART signal transparent	✓	✓	
Mounting in Zone 2 / Div 2	✓	✓	✓
Power rail option	✓	✓	✓



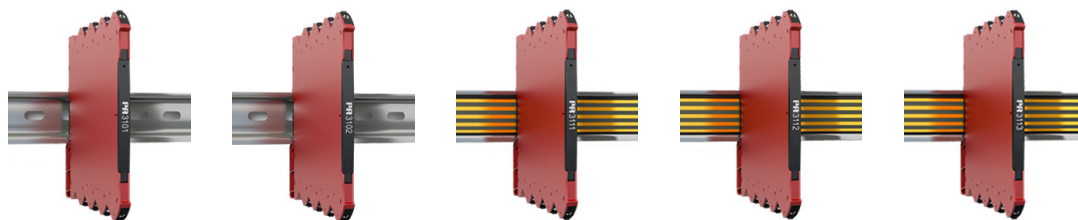

TYPE	3101	3102	3111	3112	3113
INPUT: RTD, linear resistance, TC, mV, mA, potentiometer OUTPUT: mA, HART communication	TC converter 	Pt100 converter 	TC converter - isolated 	Pt100 converter - isolated 	HART 7 temperature converter
INPUT:					
RTD, measurement range / min. span		-200...+850°C / 10°C		-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span					
Sensor connection, wires		2 - 3 - 4		2 - 3 - 4	2 - 3 - 4
TC types	J & K		J & K		J & K
Max. offset					
Cold junction compensation	Internal		Internal / external		Internal / external
OUTPUT:					
mA, signal range / min. span	0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA
Load (@ current output)	≤ 600 Ω	≤ 600 Ω	≤ 600 Ω	≤ 600 Ω	≤ 600 Ω
V, signal range / min. span	0...10 VDC / 4 VDC	0...10 VDC / 4 VDC	0...10 VDC / 4 VDC	0...10 VDC / 4 VDC	
Load (@ voltage output)	≥ 10 kΩ	≥ 10 kΩ	≥ 10 kΩ	≥ 10 kΩ	
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-25...70°C	-25...70°C	-25...70°C	-25...70°C	-25...70°C
Supply voltage, DC	16.8...31.2 VDC	16.8...31.2 VDC	16.8...31.2 VDC	16.8...31.2 VDC	16.8...31.2 VDC
Max. required power*	0.52 W	0.52 W	0.7 W	0.7 W	0.7 W
Isolation voltage, test / operation			2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC	2.5 kVAC / 250 VAC
Response time	< 30 ms	< 30 ms	< 30 ms	< 30 ms	< 60 ms
Signal dynamics, input / output	23 bit / 18 bit	23 bit / 18 bit	23 bit / 18 bit	23 bit / 18 bit	23 bit / 18 bit
Accuracy	≤ ±0.1% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C
NAMUR	NE21, NE43	NE21, NE43	NE21, NE43	NE21, NE43	NE21, NE43
Channels	1	1	1	1	1
Programming	DIP-switch	DIP-switch	DIP-switch	DIP-switch	DIP-switch / HART
APPROVALS:					
ATEX, Zone 2	✓	✓	✓	✓	✓
IECEX, Zone 2	✓	✓	✓	✓	✓
UKEX, Zone 2	✓	✓	✓	✓	✓
FM, Zone 2 - DIV 2	✓	✓	✓	✓	✓
UL 61010 / 508	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
DNV	✓	✓	✓	✓	✓
EAC	✓	✓	✓	✓	✓
APPLICATION GUIDE:					
RTD / TC / mV input	- / ✓ / -	✓ / - / -	- / ✓ / -	✓ / - / -	✓ / ✓ / -
mA / V output	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / -
Loop-powered					
Galvanically isolated			✓	✓	✓
HART protocol					✓
Mounting in Zone 2 / DIV 2	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Process signal calibration					✓
Power rail option			✓	✓	✓

TEMPERATURE TRANSMITTERS

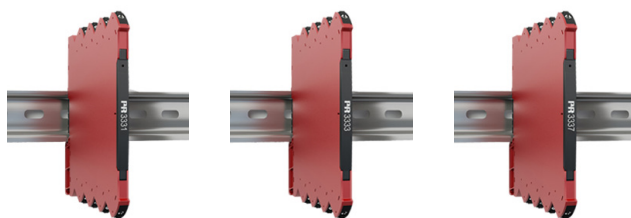

TYPE	3331	3333	3337		
INPUT: RTD, linear resistance, TC, mV OUTPUT: mA, V, HART communication	Temperature converter, loop-powered - isolated 	Pt100 converter, loop-powered 	HART 7 temperature converter, loop-powered 		
INPUT:					
RTD, measurement range / min. span	-200...+850°C / 10°C	-200...+850°C / 10°C	-200...+850°C / 10°C		
Lin. R, measurement range / min. span					
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4	2 - 3 - 4		
TC types	J & K		J & K		
Max. offset					
Cold junction compensation	Internal / external		Internal / external		
OUTPUT:					
mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA		
Load (@ current output)	$\leq (V_{\text{supply}} - 5.5) / 0.023 [\Omega]$	$\leq (V_{\text{supply}} - 3.3) / 0.023 [\Omega]$	$\leq (V_{\text{supply}} - 6.2) / 0.023 [\Omega]$		
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-25...70°C	-25...70°C	-25...70°C		
Supply voltage, DC	5.5...35 VDC	3.3...35 VDC	6.2...35 VDC		
Max. required power	0.8 W	0.8 W	0.8 W		
Isolation voltage, test / operation	2.5 kVAC / 250 VAC		2.5 kVAC / 250 VAC		
Response time	< 30 ms	< 30 ms	< 60 ms		
Signal dynamics, input / output	23 bit / 18 bit	23 bit / 18 bit	23 bit / 18 bit		
Accuracy	$\leq \pm 0.05\%$ of span	$\leq \pm 0.1\%$ of span	$\leq \pm 0.05\%$ of span		
Temperature coefficient	< $\pm 0.01\%$ of span / °C	< $\pm 0.01\%$ of span / °C	< $\pm 0.01\%$ of span / °C		
NAMUR	NE21, NE43	NE21, NE43	NE21, NE43		
Channels	1	1	1		
Programming	DIP-switch	DIP-switch	DIP-switch / HART		
APPROVALS:					
ATEX, Zone 2	✓	✓	✓		
IECEx, Zone 2	✓	✓	✓		
UKEX, Zone 2	✓	✓	✓		
FM, Zone 2 - DIV 2	✓	✓	✓		
UL 61010 / 508	✓ / -	✓ / -	✓ / -		
DNV	✓	✓	✓		
EAC	✓	✓	✓		
APPLICATION GUIDE:					
RTD / TC / mV input	✓ / ✓ / -	✓ / - / -	✓ / ✓ / -		
mA / V output	✓ / -	✓ / -	✓ / -		
Loop-powered	✓	✓	✓		
Galvanically isolated	✓		✓		
HART protocol			✓		
Mounting in Zone 2 / DIV 2	✓ / ✓	✓ / ✓	✓ / ✓		
Process signal calibration			✓		

TEMPERATURE TRANSMITTERS



TYPE	5331A	5332A	5333A	5334A	
INPUT: RTD, linear resistance, TC, mV, potentiometer OUTPUT: mA	2-wire programmable transmitter 	2-wire programmable RTD transmitter 	2-wire programmable transmitter 	2-wire programmable transmitter 	
INPUT:					
mV, measurement range / min. span	-12...800 mV / 5 mV			-12...150 mV / 5 mV	
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 25°C		
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω		
Potentiometer					
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4	2 - 3		
TC types	BEJLNRSTUW3W5Lr			BEJLNRSTUW3W5Lr	
Max. offset	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	
Cold junction compensation	Internal / external			Internal	
OUTPUT:					
mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-40...+85°C	-40...+85°C	-40...+85°C	-40...+85°C	
Supply voltage, DC	7.2...35 VDC	7.2...35 VDC	8...35 VDC	7.2...35 VDC	
Max. required power	0.8 W	0.8 W	0.8 W	0.8 W	
Isolation voltage, test / operation	1500 VAC / 50 V			1500 VAC / 50 V	
Response time	1...60 s	1...60 s	0.33...60 s	1...60 s	
Signal dynamics, input / output	20 bit / 16 bit	20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit	
Accuracy	± 0.05% of span	± 0.05% of span	± 0.1% of span	± 0.05% of span	
Temperature coefficient	< ± 0.01% of span / °C	< ± 0.01% of span / °C	< ± 0.01% of span / °C	< ± 0.01% of span / °C	
NAMUR	NE21, NE43	NE43	NE43	NE21, NE43	
Channels	1	1	1	1	
Programming	5909	5909	5909	5909	
APPROVALS:					
ATEX, Zone 2	✓	✓	✓	✓	
IECEX, Zone 2	✓	✓	✓	✓	
CSA, Zone 2 - DIV 2	✓	✓	✓		
FM, Zone 2 - DIV 2					
INMETRO, Zone 2	✓	✓	✓	✓	
NEPSI					
DNV	✓		✓	✓	
EAC	✓		✓	✓	
SIL Hardware Assessment					
APPLICATION GUIDE:					
RTD / TC / mV input	✓ / ✓ / ✓	✓ / - / -	✓ / - / -	- / ✓ / ✓	
Lin. R / potentiometer input	✓ / -	✓ / -	✓ / -		
Dual input (4 terminals)					
Custom sensor linearization	✓	✓	✓	✓	
mA output	✓	✓	✓	✓	
Loop-powered	✓	✓	✓	✓	
Galvanically isolated	✓			✓	
HART protocol					
Mounting in Zone 2 / DIV 2	✓ / -	✓ / -	✓ / -	✓ / -	
Process signal calibration	✓	✓	✓	✓	





Of span = Of the presently selected range

TEMPERATURE TRANSMITTERS



TYPE	5335A	5337A	5343A	5437A	5450A
INPUT: RTD, linear resistance, TC, mV, potentiometer OUTPUT: mA, HART communication, PROFIBUS PA	2-wire transmitter with HART 5 protocol 	2-wire transmitter with HART 7 protocol 	2-wire level transmitter 	2-wire HART 7 temperature transmitter 	PROFIBUS PA temperature transmitter
INPUT:					
mV, measurement range	-800...+800 mV	-800...+800 mV		± 800 mV, -0.1...+1.7 V	± 800 mV, -0.1...+1.7 V
mV, min. span	2.5 mV	2.5 mV		2.5 mV	2.5 mV
RTD, measurement range / min. span	-200...+850°C / 10°C	-200...+850°C / 10°C		-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span	0...7000 Ω / 25 Ω	0...7000 Ω / 25 Ω		0...100 kΩ / 25 Ω	0...100 kΩ / 25 Ω
Potentiometer			0...100 kΩ / 1 kΩ	10 Ω...100 kΩ / 10%	10 Ω...100 kΩ / 10%
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4		2 - 3 - 4	2 - 3 - 4
TC types	BEJKNRSTUW3W5	BEJKNRSTUW3W5		BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr
Max. offset	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value		
Cold junction compensation	Internal / external	Internal / external	Internal / external	Internal / external	Internal / external
OUTPUT:					
mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	PROFIBUS PA
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-40...+85°C	-40...+85°C	-40...+85°C	-50...+85°C	-40...+85°C
Supply voltage, DC	8...35 VDC	8...35 VDC	8...35 VDC	7.5...48 VDC	9...32 VDC
Max. required power	0.8 W	0.8 W	0.8 W	< 850 mW	< 352 mW
Isolation voltage, test / operation	1500 VAC / 50 V	1500 VAC / 50 V		2.5 kVAC / 55 VAC	2.5 kVAC / 55 VAC
Response time	1...60 s	1...60 s	0.33...60 s	75 ms	< 400 ms
Signal dynamics, input / output	22 bit / 16 bit	22 bit / 16 bit	19 bit / 16 bit	24 bit / 18 bit	24 bit / -
Accuracy	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of reading
Temperature coefficient	< ±0.005% of span / °C	< ±0.005% of span / °C	≤ ±0.01% of span / °C	< ±0.005% of span / °C	< ±0.005% of reading / °C
NAMUR	NE21, NE43, NE89	NE21, NE43, NE89	NE43	NE 21/43/44/89/95/107/130	NE 21/44/89/107
Channels	1	1	1	1 or 2*	1 or 2*
Programming	5909 / HART 5	5909 / HART 7 / HART 5	5909	5909 / HART 7 / HART 5	PROFIBUS PA
APPROVALS:					
ATEX, Zone 2	✓	✓	✓	✓	✓
IECEX, Zone 2	✓	✓	✓	✓	✓
CSA, Zone 2 - DIV 2	✓	✓		✓	✓
FM, Zone 2 - DIV 2				✓	✓
INMETRO, Zone 2	✓	✓	✓	✓	✓
NEPSI				✓	✓**
DNV / EU-RO marine	✓ / -	✓ / -	✓ / -	- / ✓	
EAC	✓	✓	✓	✓	✓
SIL Hardware Assessment	✓	✓			
SIL 2/3 Full Assessment IEC 61508				✓ / ✓	
APPLICATION GUIDE:					
RTD / TC / mV input	✓ / ✓ / ✓	✓ / ✓ / ✓		✓ / ✓ / ✓	✓ / ✓ / ✓
Lin. R / potentiometer input	✓ / -	✓ / -	✓ / ✓	✓ / ✓	✓ / ✓
Dual input (4 terminals)	✓	✓			
True dual input (7 terminals)				✓	✓
Custom sensor linearization	✓	✓	✓	✓	✓
mA output	✓	✓	✓	✓	
Loop-powered	✓	✓	✓	✓	
Galvanically isolated	✓	✓		✓	✓
HART protocol / bus communication	✓ / -	✓ / -		✓ / -	- / ✓
Mounting in Zone 2 / DIV 2	✓ / -	✓ / -	✓ / -	✓ / ✓	✓ / ✓
Process signal calibration	✓	✓	✓	✓	✓

TEMPERATURE TRANSMITTERS



TYPE	6331A	6333A	6334A	6335A	6337A
INPUT: RTD, linear resistance, TC, mV, potentiometer	2-wire programmable transmitter	2-wire programmable transmitter	2-wire programmable transmitter	2-wire HART 5 transmitter	2-wire HART 7 transmitter
OUTPUT: mA, HART communication					
INPUT:					
mV, measurement range / min. span	-12...800 mV / 5 mV		-12...+150 mV / 5 mV	-800...+800 mV / 2.5 mV	-800...+800 mV / 2.5 mV
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C		-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω		0...7000 Ω / 25 Ω	0...7000 Ω / 25 Ω
Potentiometer					
Sensor connection, wires	2 - 3 - 4	2 - 3		2 - 3 - 4	2 - 3 - 4
TC types	BEJKNRSTUW3W5Lr		BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5	BEJKNRSTUW3W5
Max. offset	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value
Cold junction compensation	Internal / external		Internal	Internal / external	Internal / external
OUTPUT:					
mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-40...+85°C	-40...+85°C	-40...+85°C	-40...+85°C	-40...+85°C
Supply voltage, DC	7.2...35 VDC	8...35 VDC	7.2...35 VDC	8...35 VDC	8...35 VDC
Max. required power, 1 / 2 channels	0.8 W / 1.6 W	0.8 W / 1.6 W	0.8 W / 1.6 W	0.8 W / 1.6 W	0.8 W / 1.6 W
Isolation voltage, test / operation	1500 VAC / 50 V		1500 VAC / 50 V	1500 VAC / 50 V	1500 VAC / 50 V
Response time	1...60 s	0.33...60 s	1...60 s	1...60 s	1...60 s
Signal dynamics, input / output	20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit	22 bit / 16 bit	22 bit / 16 bit
Accuracy	≤ ±0.05% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C
NAMUR	NE21, NE43	NE43	NE21, NE43	NE21, NE43, NE89	NE21, NE43, NE89
Channels	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2
Programming	5909	5909	5909	5909/HART 5	5909/HART 7/HART 5
APPROVALS:					
ATEX, Zone 2	✓	✓	✓	✓	✓
IECEx, Zone 2	✓	✓	✓	✓	✓
CSA, Zone 2 - DIV 2	✓	✓		✓	✓
FM, Zone 2 - DIV 2					
INMETRO, Zone 2	✓	✓	✓	✓	✓
UL 61010 / 508					
DNV					
EAC	✓	✓	✓	✓	✓
SIL Hardware Assessment				✓	✓
SIL 2 Full Assessment IEC 61508					
APPLICATION GUIDE:					
RTD / TC / mV input	✓ / ✓ / ✓	✓ / - / -	- / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Lin. R / potentiometer input	✓ / -	✓ / -		✓ / -	✓ / -
Dual input (4 terminals)				✓	✓
Custom sensor linearization	✓	✓	✓	✓	✓
mA output	✓	✓	✓	✓	✓
Loop-powered	✓	✓	✓	✓	✓
Galvanically isolated	✓		✓	✓	✓
HART protocol				✓	✓
Mounting in Zone 2 / DIV 2	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
Process signal calibration	✓	✓	✓	✓	✓

TEMPERATURE TRANSMITTERS



TYPE

6437A

7501

9113A


INPUT:

RTD, linear resistance,
TC, mV, mA, potentiometer


OUTPUT:

mA,
HART communication


2-wire HART 7
temperature transmitter



Field mounted HART
temperature transmitter



Temperature / mA
converter



INPUT:

mA, measurement range / min. span

mV, measurement range

mV, min. span

RTD, measurement range / min. span

Lin. R, measurement range / min. span

Potentiometer

Sensor connection, wires

TC types

Cold junction compensation

± 800 mV, -0.1...+1.7 V

2.5 mV

-200...+850°C / 10°C

0...100 kΩ / 25 Ω

10 Ω...100 kΩ / 10%

2 - 3 - 4

BEJKNRSTUW3W5Lr

Internal / external

-800...+800 mV

2.5 mV

-200...+850°C / 10°C

0...7000 Ω / 25 Ω

2 - 3 - 4

BEJKNRSTUW3W5

Internal / external

0...23 mA / 16 mA

-200...+850°C / 25°C

2 - 3 - 4

BEJKNRSTUW3W5Lr

Internal / external

OUTPUT:

mA, signal range / min. span

3.5...23 mA / 16 mA

3.5...23 mA / 16 mA

0...23 mA / 16 mA

TECHNICAL SPECIFICATIONS:

Ambient temperature

Supply voltage, DC

Max. required power, 1 / 2 channels

Isolation voltage, test / operation

Response time

Signal dynamics, input / output

Accuracy

Temperature coefficient

NAMUR

Channels

Programming

-50...+85°C

7.5...48 VDC

< 850 mW / -

2.5 kVAC / 55 VAC

75 ms

24 bit / 18 bit

± ±0.05% of span

< ±0.005% of span / °C

NE21 / 43 / 44 / 89 / 107

1 or 2*

5909 / HART 7 / HART 5

-40...+85°C

10 / 12...35 VDC

1500 VAC / 50 VAC

1...60 s

22 bit / 16 bit

± ±0.05% of span

< ±0.005% of span / °C

NE21, NE43

1

LOI / HART

-20...+60°C

19.2...31.2 VDC

≤ 0.8 W / ≤ 1.4 W

2.6 kVAC / 250 VAC

0.4 / 1...60 s

24 bit / 16 bit

± ±0.1% of span

< ±0.01% of span / °C

NE21, NE43

1 or 2

4500 series devices

APPROVALS:

ATEX, Zone 2 / IECEx, Zone 2

UKEX, Zone 2

CSA, Zone 2 - DIV 2 / FM, Zone 2 - DIV 2

INMETRO, Zone 2 / NEPSI

UL 61010 / 913

DNV / EU-RO marine

EAC

SIL Hardware Assessment

SIL 2/3 Full Assessment IEC 61508

CCC / KCs

✓ / ✓

✓ / ✓

✓ / ✓

✓ / ✓

✓ / ✓

- / ✓

✓

✓

✓ / ✓

✓ / ✓

✓ / ✓

✓ / ✓

✓ / ✓

- / ✓

✓

✓

✓

✓ / ✓

✓

- / ✓

✓ / -

✓ / ✓

✓ / -

✓

✓ / -

✓ / ✓

APPLICATION GUIDE:

RTD / TC / mV input

Lin. R / potentiometer input

Dual input (4 terminals)

True dual input (8 terminals)

Custom sensor linearization

mA output

Loop-powered

Galvanically isolated

HART protocol

Process signal calibration

Power rail option

✓ / ✓ / ✓

✓ / ✓

✓

✓

✓

✓

✓

✓

✓

✓

✓ / ✓ / ✓

✓ / -

✓

✓

✓

✓

✓

✓

✓

✓

✓ / ✓ / -

✓ / -

✓

✓

✓

✓

✓

✓

✓

✓



TYPE	5331D	5332D	5333D	5334B
INPUT: RTD, linear resistance, TC, mV, potentiometer	2-wire programmable transmitter	2-wire programmable RTD transmitter	2-wire programmable transmitter	2-wire programmable transmitter
OUTPUT: mA				
INPUT:				
mV, measurement range / min. span	-12...800 mV / 5 mV	-12...800 mV / 5 mV	-12...800 mV / 5 mV	-12...150 mV / 5 mV
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 25°C
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω	0...5000 Ω / 30 Ω
Potentiometer				
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4	2 - 3	2 - 3 - 4
TC types	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr
Max. offset				
Cold junction compensation	Internal / external	Internal / external	Internal / external	Internal
OUTPUT:				
mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
TECHNICAL SPECIFICATIONS:				
Ambient temperature	-40...+85°C	-40...+85°C	-40...+85°C	-40...+85°C
Supply voltage, DC	7.2...30 VDC	7.2...30 VDC	8...30 VDC	7.2...30 VDC
Max. required power	0.7 W	0.7 W	0.7 W	0.7 W
Isolation voltage, test / operation	1500 VAC / 50 V	1500 VAC / 50 V	1500 VAC / 50 V	1500 VAC / 50 V
Response time	1...60 s	1...60 s	0.33...60 s	1...60 s
Signal dynamics, input / output	20 bit / 16 bit	20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit
Accuracy	± 0.05% of span	± 0.05% of span	± 0.1% of span	± 0.05% of span
Temperature coefficient	< ± 0.01% of span / °C	< ± 0.01% of span / °C	< ± 0.01% of span / °C	< ± 0.01% of span / °C
NAMUR	NE21, NE43	NE21, NE43	NE43	NE21, NE43
Channels	1	1	1	1
Programming	5909	5909	5909	5909
APPROVALS:				
ATEX	✓	✓	✓	✓
IECEx	✓	✓	✓	✓
FM	✓	✓	✓	✓
CSA	✓	✓	✓	✓
INMETRO	✓	✓	✓	✓
DNV	✓	✓	✓	✓
EAC Ex	✓	✓	✓	✓
NEPSI	✓	✓	✓	✓
SIL Hardware Assessment	✓	✓	✓	✓
APPLICATION GUIDE:				
RTD / TC / mV input	✓ / ✓ / ✓	✓ / - / -	✓ / - / -	- / ✓ / ✓
Lin. R / potentiometer input	✓ / -	✓ / -	✓ / -	✓ / -
Dual input (4 terminals)	✓	✓	✓	✓
Custom sensor linearization	✓	✓	✓	✓
mA output	✓	✓	✓	✓
Loop-powered	✓	✓	✓	✓
Galvanically isolated	✓	✓	✓	✓
HART protocol	✓	✓	✓	✓
Process signal calibration	✓	✓	✓	✓

I.S. TEMPERATURE TRANSMITTERS



TYPE

5335D

5337D

5343B

5437D






5450D

INPUT:

RTD, linear resistance,
TC, mV, potentiometer

OUTPUT:

mA,
HART communication,
PROFIBUS PA



INPUT:

mV, measurement range	-800...+800 mV	-800...+800 mV		± 800 mV, -0.1...+1.7 V	± 800 mV, -0.1...+1.7 V
mV, min. span	2.5 mV	2.5 mV		2.5 mV	2.5 mV
RTD, measurement range / min. span	-200...+850°C / 10°C	-200...+850°C / 10°C		-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span	0...7000 Ω / 25 Ω	0...7000 Ω / 25 Ω	0...100 kΩ / 1 kΩ	0...100 kΩ / 25 Ω	0...100 kΩ / 25 Ω
Potentiometer			1 kΩ...100 kΩ	10 Ω...100 kΩ / 10%	10 Ω...100 kΩ / 10%
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4		2 - 3 - 4	2 - 3 - 4
TC types	BEJKNRSTUW3W5	BEJKNRSTUW3W5		BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr
Max. offset			50% of selec. max. value		
Cold junction compensation	Internal / external	Internal / external		Internal / external	Internal / external

OUTPUT:

mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	PROFIBUS PA
------------------------------	---------------------	---------------------	---------------------	---------------------	-------------

TECHNICAL SPECIFICATIONS:

Ambient temperature	-40...+85°C	-40...+85°C	-40...+85°C	-50...+85°C	-40...+85°C
Supply voltage, DC	8...30 VDC	8...30 VDC	8...30 VDC	7.5...30 VDC	9...30 VDC
Max. required power	0.7 W	0.7 W	0.7 W	< 850 mW	< 352 mW
Isolation voltage, test / operation	1500 VAC / 50 V	1500 VAC / 50 V		2.5 kVAC / 42 VAC	2.5 kVAC / 42 VAC
Response time	1...60 s	1...60 s	0.33...60 s	75 ms	< 400 ms
Signal dynamics, input / output	22 bit / 16 bit	22 bit / 16 bit	19 bit / 16 bit	24 bit / 18 bit	24 bit / -
Accuracy	± 0.05% of span	± 0.05% of span	± 0.1% of span	± 0.05% of span	± 0.05% of reading
Temperature coefficient	< ± 0.005% of span / °C	< ± 0.005% of span / °C	± 0.01% of span / °C	< ± 0.005% of span / °C	< ± 0.005% of reading / °C
NAMUR	NE21, NE43, NE89	NE21, NE43, NE89	NE43	NE21/43/44/89/95/107/130	NE21/44/89/107
Channels	1	1	1	1 or 2*	1 or 2*
Programming	5909/HART 5	5909/HART 7/HART 5	5909	5909 / HART 7 / HART 5	PROFIBUS PA




APPROVALS:

ATEX	✓	✓	✓	✓	✓
IECEx	✓	✓	✓	✓	✓
FM	✓	✓	✓	✓	✓
CSA	✓	✓	✓	✓	✓
INMETRO	✓	✓	✓	✓	✓
DNV / EU-RO marine	✓ / -	✓ / -	✓ / -	- / ✓	✓
EAC Ex			✓	✓	✓
NEPSI				✓	✓**
SIL Hardware Assessment	✓	✓			
SIL 2/3 Full Assessment IEC 61508				✓ / ✓	

APPLICATION GUIDE:

RTD / TC / mV input	✓ / ✓ / ✓	✓ / ✓ / ✓		✓ / ✓ / ✓	✓ / ✓ / ✓
Lin. R / potentiometer input	✓ / -	✓ / -		✓ / ✓	✓ / ✓
Dual input (4 terminals)	✓	✓			
True dual input (7 terminals)			✓		✓
Custom sensor linearization	✓	✓	✓	✓	✓
mA output	✓	✓	✓	✓	
Loop-powered	✓	✓		✓	
Galvanically isolated	✓	✓		✓	✓
HART protocol / bus communication	✓ / -	✓ / -		✓ / -	- / ✓
Process signal calibration	✓	✓		✓	✓

I.S. TEMPERATURE TRANSMITTERS



TYPE	6331B	6333B	6334B	6335D	6337D
INPUT: RTD, linear resistance, TC, mV, potentiometer	2-wire programmable transmitter	2-wire programmable transmitter	2-wire programmable transmitter	2-wire HART 5 transmitter	2-wire HART 7 transmitter
OUTPUT: mA, HART communication					
INPUT:					
mV, measurement range / min. span	-12...800 mV / 5 mV	-12...800 mV / 5 mV	-12...+150 mV / 5 mV	-800...+800 mV / 2.5 mV	-800...+800 mV / 2.5 mV
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 25°C	-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω	0...10 kΩ / 30 Ω	0...7000 Ω / 25 Ω	0...7000 Ω / 25 Ω
Potentiometer					
Sensor connection, wires	2 - 3 - 4	2 - 3	2 - 3	2 - 3 - 4	2 - 3 - 4
TC types	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5	BEJKNRSTUW3W5
Max. offset	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value
Cold junction compensation	Internal / external	Internal / external	Internal / external	Internal / external	Internal / external
OUTPUT:					
mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-40...+85°C	-40...+85°C	-40...+85°C	-40...+85°C	-40...+85°C
Supply voltage, DC	7.2...30 VDC	8...30 VDC	7.2...30 VDC	8...30 VDC	8...30 VDC
Max. required power, 1 / 2 channels	0.7 W / 1.4 W	0.7 W / 1.4 W	0.7 W / 1.4 W	0.7 W / 1.4 W	0.7 W / 1.4 W
Isolation voltage, test / operation	1500 VAC / 50 V	1500 VAC / 50 V	1500 VAC / 50 V	1500 VAC / 50 V	1500 VAC / 50 V
Response time	1...60 s	0.33...60 s	1...60 s	1...60 s	1...60 s
Signal dynamics, input / output	20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit	22 bit / 16 bit	22 bit / 16 bit
Accuracy	≤ ±0.05% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C
NAMUR	NE21, NE43	NE43	NE21, NE43	NE21, NE43, NE89	NE21, NE43, NE89
Channels	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2
Programming	5909	5909	5909	5909/HART 5	5909/HART 7/HART 5
APPROVALS:					
ATEX	✓	✓	✓	✓	✓
IECEx	✓	✓	✓	✓	✓
FM	✓	✓	✓	✓	✓
CSA	✓	✓	✓	✓	✓
INMETRO	✓	✓	✓	✓	✓
UL	✓	✓	✓	✓	✓
DNV	✓	✓	✓	✓	✓
EAC Ex	✓	✓	✓	✓	✓
SIL Hardware Assessment	✓	✓	✓	✓	✓
APPLICATION GUIDE:					
RTD / TC / mV input	✓ / ✓ / ✓	✓ / - / -	- / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Lin. R / potentiometer input	✓ / -	✓ / -		✓ / -	✓ / -
Dual input (4 terminals)	✓	✓	✓	✓	✓
Custom sensor linearization	✓	✓	✓	✓	✓
mA output	✓	✓	✓	✓	✓
Loop-powered	✓	✓	✓	✓	✓
Galvanically isolated	✓	✓	✓	✓	✓
HART protocol	✓	✓	✓	✓	✓
Process signal calibration	✓	✓	✓	✓	✓

I.S. TEMPERATURE TRANSMITTERS



TYPE

6437D

7501


INPUT:

RTD, linear resistance,
TC, mV, potentiometer


OUTPUT:

mA,
HART communication

2-wire HART 7
temperature transmitter



Field mounted HART
temperature transmitter



INPUT:

mV, measurement range	± 800 mV, -0.1...+1.7 V	-800...+800 mV
mV, min. span	2.5 mV	2.5 mV
RTD, measurement range / min. span	-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span	0...100 kΩ / 25 Ω	0...7000 Ω / 25 Ω
Potentiometer	10 Ω...100 kΩ / 10%	
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4
TC types	BEJLNRSTUW3W5Lr	BEJLNRSTUW3W5
Cold junction compensation	Internal / external	Internal / external

OUTPUT:

mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
------------------------------	---------------------	---------------------

TECHNICAL SPECIFICATIONS:

Ambient temperature	-50...+85°C	-40...+85°C
Supply voltage, DC	7.5...30 VDC	10 / 12...30 VDC
Max. required power, 1 / 2 channels	< 850 mW / -	
Isolation voltage, test / operation	2.5 kVAC / 42 VAC	1500 VAC / 50 V
Response time	75 ms	1...60 s
Signal dynamics, input / output	24 bit / 18 bit	22 bit / 16 bit
Accuracy	± 0.05% of span	± 0.05% of span
Temperature coefficient	< ± 0.005% of span / °C	< ± 0.005% of span / °C
NAMUR	NE21 / 43 / 44 / 89 / 107	NE21, NE43
Channels	1 or 2*	1
Programming	5909 / HART 7 / HART 5	LOI / HART

APPROVALS:

ATEX	✓	✓
IECEX	✓	✓
FM	✓	✓
CSA	✓	✓
INMETRO	✓	✓
EU-RO marine	✓	✓
EAC Ex	✓	✓
NEPSI	✓	✓
SIL Hardware Assessment	✓	✓
SIL 2/3 Full Assessment IEC 61508	✓ / ✓	

APPLICATION GUIDE:

RTD / TC / mV input	✓ / ✓ / ✓	✓ / ✓ / ✓
Lin. R / potentiometer input	✓ / ✓	✓ / -
Dual input (4 terminals)		✓
True dual input (8 terminals)	✓	
Custom sensor linearization	✓	✓
mA output	✓	✓
Loop-powered	✓	✓
Galvanically isolated	✓	✓
HART protocol	✓	✓
Process signal calibration	✓	✓



TYPE	9106B	9107B	9113B	9116B	
INPUT: mA, mV, V, potentiometer, RTD, Lin. R, TC, HART communication	HART transparent repeater	HART transparent driver	Temperature / mA converter	Universal converter	
OUTPUT: mA, relays, HART communication					
INPUT:					
mA, measurement range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA	
V, measurement range / min. span				0...12 VDC / 0.8 V	
RTD, measurement range / min. span			-200...+850°C / 25°C	-200...+850°C / 25°C	
Lin. R, measurement range / min. span				0...10000 Ω / -	
Potentiometer				10 Ω...10000 Ω	
Sensor connection, wires			2 - 3 - 4	2 - 3 - 4	
TC types			BEJLNRSTUW3W5Lr	BEJLNRSTUW3W5Lr	
OUTPUT:					
mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA	
Relay				1 x SPST, AC: 500 VA	
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C	
Supply voltage, DC	19.2...31.2 VDC	19.2...31.2 VDC	19.2...31.2 VDC	19.2...31.2 VDC	
Max. required power, 1 / 2 channels	≤ 1.1 W / ≤ 1.9 W	≤ 1.0 W / ≤ 1.8 W	≤ 0.8 W / ≤ 1.4 W	≤ 2.1 W / -	
Isolation voltage, test / operation	2.6 kVAC / 250 VAC	2.6 kVAC / 250 VAC	2.6 kVAC / 250 VAC	2.6 kVAC / 250 VAC	
Response time	< 5 ms	< 5 ms	0.4 / 1...60 s	0.4 / 1...60 s	
Signal dynamics, input / output	Analog signal chain	Analog signal chain	24 bit / 16 bit	24 bit / 16 bit	
Accuracy	< ±16 µA	< ±16 µA	≤ ±0.1% of span	≤ ±0.1% of span	
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	
NAMUR	NE21	NE21	NE21, NE43	NE21, NE43	
Channels	1 or 2	1 or 2	1 or 2	1	
Programming	4500 series devices	4500 series devices	4500 series devices	4500 series devices	
APPROVALS:					
ATEX	✓	✓	✓	✓	
IECEx	✓	✓	✓	✓	
UKEX	✓	✓	✓	✓	
FM	✓	✓	✓	✓	
INMETRO	✓	✓	✓	✓	
UL 61010 / 913	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	
DNV	✓	✓	✓	✓	
EAC Ex	✓	✓	✓	✓	
SIL 2/3 Full Assessment IEC 61508	✓ / ✓	✓ / -	✓ / -	✓ / -	
CCC / KCs	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	
APPLICATION GUIDE:					
AI barrier	✓		✓	✓	
AO barrier		✓			
DI barrier					
DO barrier					
mA / V / temperature input	✓ / - / -	✓ / - / -	✓ / - / ✓	✓ / ✓ / ✓	
4...20 mA Tx input	✓			✓	
mA / V / relay output	✓ / - / -	✓ / - / -	✓ / - / -	✓ / - / ✓	
Active / passive mA output	✓ / ✓	✓ / -	✓ / ✓	✓ / ✓	
HART signal transparent	✓	✓			
Process signal calibration			✓	✓	
Power rail option	✓	✓	✓	✓	



TYPE

9202B

9203B

INPUT:



Hz

OUTPUT:

Pulse, relay

Pulse isolator

Solenoid / alarm driver



INPUT:

mA, measurement range / min. span
V, measurement range / min. span
RTD, measurement range / min. span
Lin. R, measurement range / min. span
Potentiometer
Sensor connection, wires
TC types
Sensor type
Hz, measurement range / min. span
Min. pulse width

NAMUR / switch

0...5 kHz

100 µs

NPN / PNP / switch

OUTPUT:

mA, signal range / min. span
Pulse output
Hz, signal range
Relay

NPN / relay

Valves etc.

0...5 kHz

1 x SPST, AC: 500 VA

TECHNICAL SPECIFICATIONS:

Ambient temperature
Supply voltage, DC
Max. required power, 1 / 2 channels
Isolation voltage, test / operation
Response time
Signal dynamics, input / output
Accuracy
Temperature coefficient
NAMUR
Channels
Programming

-20...+60°C

19.2...31.2 VDC

≤ 1.1...1.3 W / ≤ 1.5...1.9 W

2.6 kVAC / 250 VAC

200 ms

Signal dynamics, input / output

Accuracy

Temperature coefficient

NE21

1 or 2

4500 series devices

-20...+60°C

19.2...31.2 VDC

≤ 1.9...2.5 W / ≤ 3.1 W

2.6 kVAC / 250 VAC

< 10 ms

Signal dynamics, input / output

Accuracy

Temperature coefficient

NE21

1 or 2

4500 series devices

APPROVALS:

ATEX
IECEx
UKEX
FM
INMETRO
UL 61010 / 913
DNV
EAC Ex
SIL 2/3 Full Assessment IEC 61508
CCC / KCs

✓

✓

✓

✓

✓

✓ / ✓

✓

✓

✓ / -

✓ / ✓

✓

✓

✓

✓

✓

✓ / ✓

✓

✓

✓ / -

✓ / ✓

APPLICATION GUIDE:


AI barrier
AO barrier
DI barrier
DO barrier
mA / V / temperature input
4...20 mA Tx input
mA / V / relay output
Active / passive mA output
HART signal transparent
Process signal calibration
Power rail option

✓

- / - / ✓

✓

✓

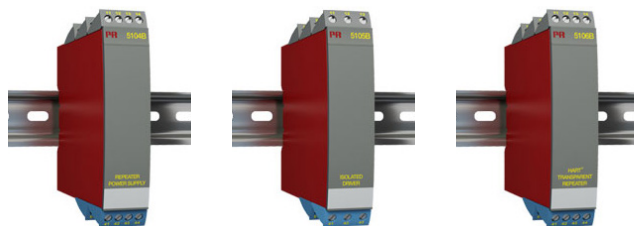




TYPE	5104B-U9*	5105B-U9*	5106B-U9*
------	-----------	-----------	-----------

INPUT:

mA, mV, V, potentiometer,
RTD, linear resistance, TC,
HART transparent

OUTPUT:

mA, V, relays,
HART transparent



INPUT:

mA, measurement range / min. span	0...23 mA / 16 mA	0...23 mA / 16 mA	3.5...23 mA / 16 mA
V, measurement range / min. span	0...10 VDC / 8 VDC	0...10 VDC / 8 VDC	
mV, measurement range / min. span			
RTD, measurement range / min. span			
Lin. R, measurement range / min. span			
Potentiometer			
Sensor connection, wires			
TC types			
Max. offset	20% of selec. max. value	20% of selec. max. value	20% of selec. max. value

OUTPUT:

mA, signal range / min. span	0...23 mA / 16 mA	0...23 mA / 16 mA	3.5...23 mA / 16 mA
Load (@ current output)	≤ 600 Ω	≤ 770 Ω	≤ 600 Ω
V, signal range / min. span	0...10 VDC / 0.8 VDC	0...10 VDC / 0.8 VDC	
Max. offset	20% of selec. max. value	20% of selec. max. value	20% of selec. max. value

TECHNICAL SPECIFICATIONS:


Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C
Supply voltage, AC / DC	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V
Max. required power, 1 / 2 channels	2.0 W / 2.8 W	1.3 W / 2.0 W	2.0 W / 2.8 W
Isolation voltage, test / operation	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC
Response time	< 25 ms	< 25 ms	< 25 ms
Signal dynamics, input / output	Analog signal chain	Analog signal chain	Analog signal chain
Accuracy	≤ ±0.1% of span	≤ ±0.1% of span	≤ ±0.1% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C
NAMUR	NE21	NE21	NE21
Channels	1 or 2	1 or 2	1 or 2
Programming	DIP-switch	DIP-switch	No

APPROVALS:

ATEX			
IECEx			
FM			
CSA			
UL 913	✓	✓	✓
DNV	✓	✓	
EAC Ex			

APPLICATION GUIDE:

AI barrier	✓		✓
AO barrier		✓	
DI barrier			
DO barrier			
RTD / TC input			
mA / V / mV input	✓ / ✓ / -	✓ / ✓ / -	✓ / - / -
4...20 mA Tx input	✓		✓
Lin. R / potentiometer input			
mA / V / relay output	✓ / ✓ / -	✓ / ✓ / -	✓ / - / -
Active / passive mA output	✓ / ✓	✓ / -	✓ / ✓
Process signal calibration			

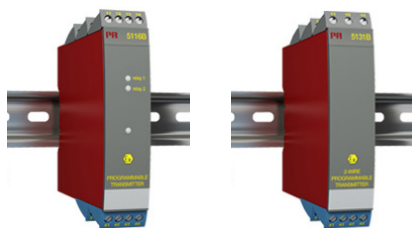

TYPE

5116B

5131B


INPUT:

mA, mV, V, potentiometer,
RTD, linear resistance, TC


OUTPUT:

mA, V, relays,

Programmable
transmitter



2-wire
programmable
transmitter



INPUT:

mA, measurement range / min. span	0...100 mA / 4 mA	0...100 mA / 4 mA
V, measurement range / min. span	0...250 VDC / 5 mV	0...250 VDC / 5 mV
mV, measurement range / min. span	-2500...+2500 mV / 5 mV	-150...+150 mV / 5 mV
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	
Potentiometer	200 Ω...100 kΩ	
Sensor connection, wires	2 - 3 - 4	2 - 3 - 4
TC types	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5Lr
Max. offset	50% of selec. max. val.	

OUTPUT:

mA, signal range / min. span	0...23 mA / 10 mA	3.5...23 mA / 10 mA
Load (@ current output)	600 Ω	
V, signal range / min. span	0...10 VDC / 0.5 VDC	
Max. offset	50% of selec. max. val.	
Relays	2 x SPST, AC: 500 VA	

TECHNICAL SPECIFICATIONS:


Ambient temperature	-20...+60°C	-20...+60°C
Supply voltage, AC / DC	21.6...253 V / 19.2...300 V	- / 7.5...35 VDC
Max. required power, 1 / 2 channels	2.4 W / -	0.8 W / 1.6 W
Isolation voltage, test / operation	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC
Response time	250 ms...60 s	250 ms...60 s
Signal dynamics, input / output	22 bit / 16 bit	22 bit / 16 bit
Accuracy	± 0.05% of span	± 0.05% of span
Temperature coefficient	< ± 0.01% of span / °C	< ± 0.01% of span / °C
NAMUR	NE21, NE43	NE21, NE43
Channels	1	1 or 2
Programming	5909	5909 + DIP-switch

APPROVALS:

ATEX	✓	✓
IECEx		✓
FM	✓	
CSA		
UL 508	✓	
DNV	✓	
EAC Ex	✓	✓





APPLICATION GUIDE:

AI barrier	✓	✓
AO barrier		
DI barrier		
DO barrier		
RTD / TC input	✓	✓
mA / V / mV input	✓	
4...20 mA Tx input	✓	✓ / - / -
Lin. R / potentiometer input	✓ / ✓	- / ✓
mA / V / relay output	✓	✓
Active / passive mA output		
Process signal calibration		

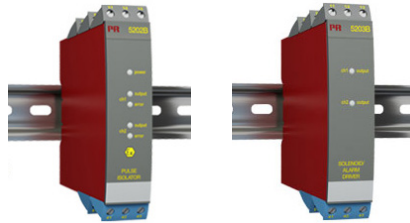

TYPE	5202B	5203B-U9*			
	Pulse isolator	Ex solenoid / alarm driver			
INPUT:					
Frequency, pulse					
OUTPUT:					
Pulse, relays					
INPUT:					
mA, measurement range / min. span					
V, measurement range / min. span					
mV, measurement range / min. span					
RTD, measurement range / min. span					
Lin. R, measurement range / min. span					
Potentiometer					
Sensor connection, wires					
TC types					
Sensor type	NAMUR / switch	NPN / PNP / switch			
Hz, measurement range / min. span	0...5 kHz				
OUTPUT:					
mA, signal range / min. span					
V, signal range / min. span					
Pulse output	NPN / relay	Valves etc.			
Hz, signal range	0...5 kHz				
Relays	2 x SPDT, AC: 100 VA				
Voltage / current					
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C			
Supply voltage, AC / DC	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V			
Max. required power, 1 / 2 channels	- / 1.8 W	2.0 W / 2.5 W			
Isolation voltage, test / operation	3.75 kVAC / 250 VAC	3.75 kVAC / 250 VAC			
Response time					
Signal dynamics, input / output					
Accuracy					
Temperature coefficient					
NAMUR	NE21	NE21			
Channels	2	1 or 2			
Programming	DIP-switch	DIP-switch			
APPROVALS:					
ATEX	✓				
IECEX	✓				
FM					
CSA					
UL 913	✓	✓			
DNV					
EAC Ex	✓				
SIL 2, Hardware Assessment					
APPLICATION GUIDE:					
AI barrier					
AO barrier					
DI barrier	✓				
DO barrier		✓			
mA / V / temperature input					
4...20 mA Tx input					
mA / V / relay output					
Active / passive mA output					
Process signal calibration					



TYPE	5531A	5714	5715	5725	
INPUT: RTD, TC, mV, mA, V, potentiometer, frequency, pulse OUTPUT: Display, mA, relays	Loop-powered LCD indicator 	Programmable LED indicator 	Programmable LED indicator 	Programmable frequency indicator 	
INPUT:					
mA, measurement range / min. span	3.6...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA		
V, measurement range / min. span		0...12 VDC / 0.8 V	0...12 VDC / 0.8 V		
Sensor type				All standard sensors 	
Hz, measurement range / min. span				0...50 kHz / 0.001 Hz	
Min. pulse width				25 µs	
RTD, measurement range / min. span		-200...+850°C	-200...+850°C		
Lin. R, measurement range / min. span		0...10000 Ω / -	0...10000 Ω / -		
Potentiometer		10 Ω...100 kΩ	10 Ω...100 kΩ		
Sensor connection, wires		2 - 3 - 4	2 - 3 - 4		
TC types		BEJ K L N R S T U W 3 W 5 L r	BEJ K L N R S T U W 3 W 5 L r		
Cold junction compensation		Internal	Internal		
Reference voltage / 2-wire supply		- / >15 VDC	- / >15 VDC		
Sensor supply				5...17 VDC	
OUTPUT:					
Display, digit / type	4-digit / LCD	4-digit / LED	4-digit / LED	4-digit / LED	
Display, digit height	16 mm	13.8 mm	13.8 mm	13.8 mm	
mA, signal range / min. span		0...23 mA / 16 mA	0...23 mA / 16 mA	0...23 mA / 16 mA	
Relay		2 x SPDT, AC: 500 VA	4 x SPDT, AC: 500 VA	2 x SPDT, AC: 500 VA	
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C	
Supply voltage, universal AC / DC	- / 1.5 VDC	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	21.6...253V / 19.2...300V	
Max. required power	<35 mW	3.5 W	3.8 W	3.6 W	
Isolation voltage, test / operation		2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC	2.3 kVAC / 250 VAC	
Response time	< 1 s	< 400 ms / < 1 s	< 400 ms / < 1 s	1...60 s	
Accuracy	≤ ±0.1% of span	≤ ±0.1% of reading	≤ ±0.1% of reading	≤ ±0.1% of reading	
Temperature coefficient	< ±0.01% of span / °C	≤ ±0.01% of reading / °C	≤ ±0.01% of reading / °C	≤ ±0.01% of reading / °C	
NAMUR		NE43	NE43	NE43	
Programming	Switch / front keys	Front keys	5909 / front keys	Front keys	
APPROVALS:					
ATEX, Zone 2	✓				
IECEX, Zone 2	✓				
UL 508		✓	✓	✓	
DNV EU-R0 marine		✓	✓	✓	
EAC	✓	✓	✓	✓	
CCC	✓				
APPLICATION GUIDE:					
mA / V / mV input	✓ / - / -	✓ / ✓ / -	✓ / ✓ / -		
Temperature input		✓	✓		
Lin. R / potentiometer input		✓ / ✓	✓ / ✓		
Frequency input				✓	
Custom sensor linearization			✓		
4...20 mA Tx input		✓	✓		
Loop-powered	✓				
mA output		✓	✓	✓	
2 / 4 relay outputs		✓ / -	- / ✓	✓ / -	
Process signal calibration	✓	✓	✓	✓	
Mounting in Zone 2	✓				

Of span = Of the presently selected range



TYPE


5531B

INPUT:

mA

OUTPUT:

Display

Loop-powered
LCD indicator

INPUT:

mA, measurement range / min. span

3.6...23 mA / 16 mA

OUTPUT:

Display, digit / type

4-digit / LCD

Display, digit height

16 mm

TECHNICAL SPECIFICATIONS:

Ambient temperature

-20...+60°C

Supply voltage, universal AC / DC

- / 1.5 VDC

Max. required power

<35 mW

Isolation voltage, test / operation

Response time

< 1 s

Accuracy

≤ ±0.1% of span

Temperature coefficient

< ±0.01% of span / °C

NAMUR

Programming

Switch / front keys

APPROVALS:

ATEX

✓

IECEx

✓

DNV

✓

EAC Ex

✓

CCC

✓

APPLICATION GUIDE:


Loop-powered

✓

Mounting in Zone 1 / 21

✓

Field enclosure

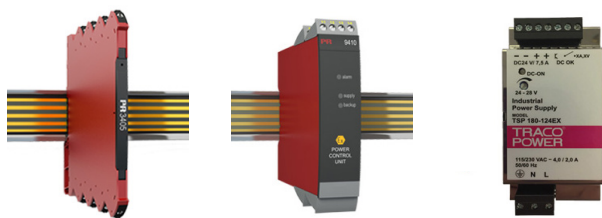


TYPE	3405	9410	9421		
INPUT: AC, DC voltage OUTPUT: Stabilized VDC	Power connector unit 	Power control unit 	Power supply 		
INPUT:					
Supply voltage, AC			85...132 VAC or 187...264 VAC		
Supply voltage, DC	16.8...31.2 VDC	21.6...26.4 VDC			
Supply voltage, back-up		21.6...26.4 VDC			
OUTPUT:					
Voltage	16.8...31.2 VDC	21.6...26.4 VDC	24 VDC		
Current	2.5 ADC	4 ADC	4.8 ADC		
Power, max.	60 W	96 W	115 W		
Status relay		1 x SPDT, AC: 500 VA			
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-25...+70°C	-20...+60°C	-20...+60°C		
Max. required power		96 W	< 135 W		
Isolation, test		2.6 kVAC	4.3 kVAC		
Short circuit protection	No	Yes	Yes		
Output ripple	Same as input	Same as input	200 mV peak / peak		
Channels	1	1	1		
Programming	No	No	No		
APPROVALS:					
ATEX, Zone 2	✓	✓	✓		
IECEX, Zone 2	✓	✓			
UKEX, Zone 2	✓				
CSA, Zone 2 - DIV 2			✓		
FM, Zone 2 - DIV 2	✓	✓			
INMETRO, Zone 2		✓			
UL 61010 / 508 / 913	✓ / - / -	✓ / - / ✓	- / ✓ / - / -		
DNV	✓	✓			
EAC	✓	✓	✓		
CCC / KCs		✓ / ✓			
APPLICATION GUIDE:					
115 / 230 VAC mains supply			✓		
24 VDC output			✓		
60 W power rail connector unit	✓				
96 W power rail connector unit		✓			
Redundancy power rail function		✓			
Collective status signal monitor		✓			
Internal fuse		✓	✓		
Mounting in Zone 2 / Div 2	✓	✓	✓		




TYPE	2224	2261			
INPUT: mA, V, potentiometer, joystick, load cell, mV OUTPUT: mA, V	Valve controller 	mV transmitter 			
INPUT:					
mA, measurement range / min. span	0...20 mA / 16 mA				
V, measurement range / min. span	-10...+10 VDC / 0.8 VDC	-40...+100 mV / 10 mV			
Potentiometer	> 1 kΩ				
Digital input	3 x PNP	1 x NPN / 1 x PNP			
Max. offset	20% of selec. max. value	70% of selec. max. value			
Excitation / reference voltage	- / -10...+10 VDC	5...13 VDC / -			
OUTPUT:					
mA, signal range / min. span	3000 mA	0...20 mA / 5 mA			
V, signal range / min. span	Supply-0.5 VDC	0...10 VDC / 0.25 VDC			
Max. offset		50% of selec. max. value			
Display, digit / type	3-digit / LED	3-digit / LED			
TECHNICAL SPECIFICATIONS:					
Ambient temperature	-20...+60°C	-20...+60°C			
Supply voltage, DC	12 or 24 VDC	19.2...28.8 VDC			
Max. required power	2.2 W	2.2 W / max. 7.2 W			
Response time	< 75 ms	60 ms...999 s			
Signal dynamics, input / output	12 bit / -	17 bit / 16 bit			
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C			
Channels	1 or 2 outputs	1			
Programming	Switch / front keys	Switch / front keys			
APPROVALS:					
EAC	✓	✓			
APPLICATION GUIDE:					
mA / V / mV input	✓ / ✓ / -	- / - / ✓			
Digital ON/OFF signal input	✓	✓			
Controller / regulator function	✓				
Load cell applications		✓			
Proportional valve applications	✓				
mA / V output		✓			

A user-friendly and reliable mounting solution between *the DCS/PLC/SIS system and isolators/I.S. interfaces*

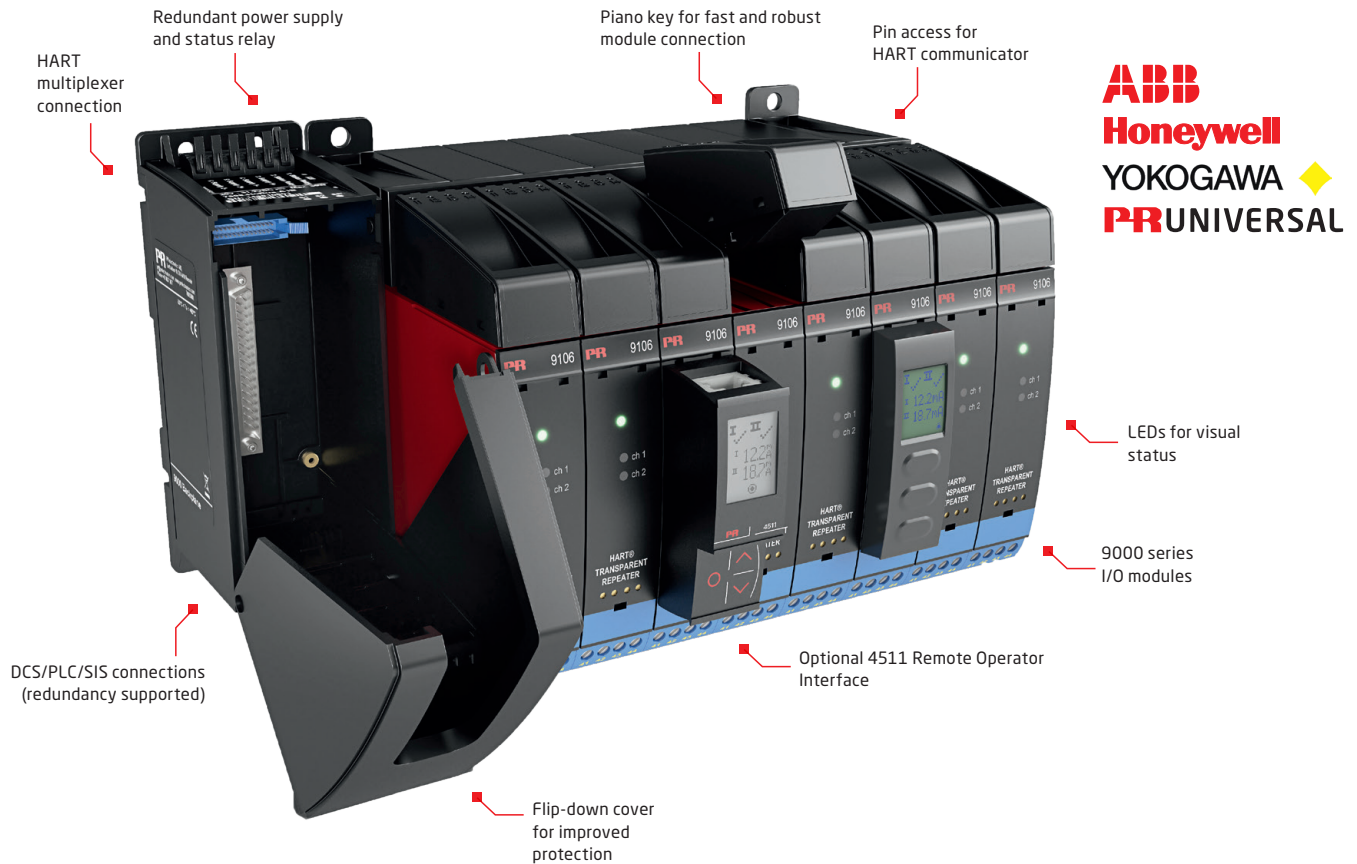


SIGNAL TYPES

INPUT

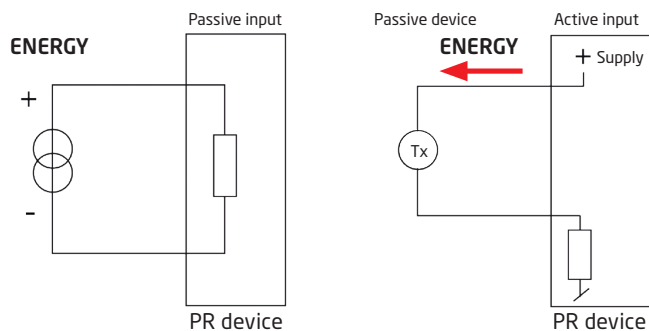

OUTPUT

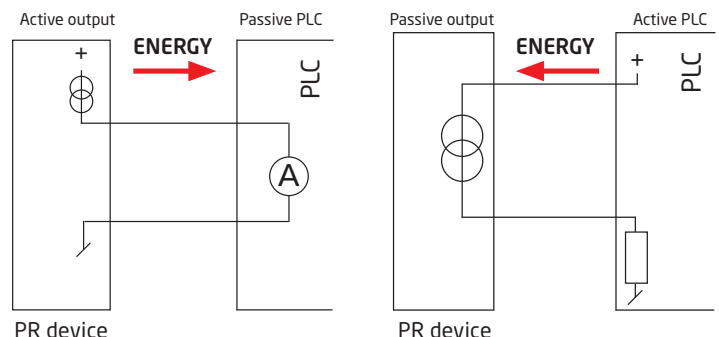

4510

Display / programming front



4511

Modbus communication enabler



4512

Bluetooth communication enabler
with data logging




4590

ConfigMate



SOFTWARE

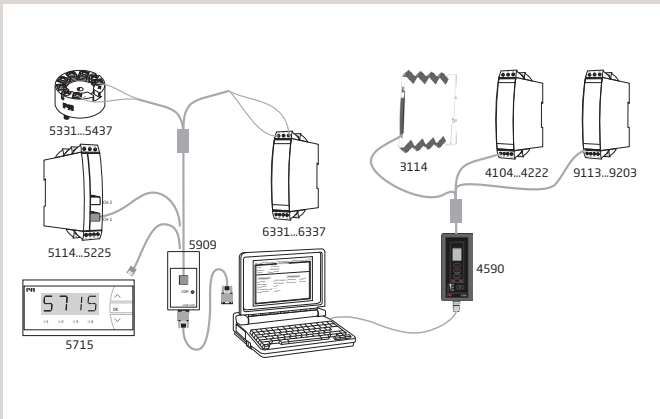

PRreset

PRreset is an easy-to-use menu-driven software program for set-up of PR products via a standard PC and a programming interface. PRreset gives a high degree of flexibility for each product and when the menus are completed, the data is transmitted to the unit which is then ready for operation.

Loop Link 5909

Loop Link 5909 is a USB communications interface for configuration and monitoring of PR electronics' PC-programmable devices. PR devices available in the configuration program PRreset ver. 5.0 or higher, can be programmed by way of Loop Link 5909.

277USB

USB HART modem



278

Bluetooth Low Energy (BLE) HART modem



3400T

Electromechanical counter



5909

Loop Link communications interface



5910

CJC connector, channel 1



5910Ex

CJC connector for I.S. / Ex devices, channel 1



5913

CJC connector, channel 2



5913Ex

CJC connector for I.S. / Ex devices, channel 2



7002

Spring clip



7005

Shunt resistor 0.1 Ω



7006

Shunt resistor 1 Ω



7007

2-digit digital potentiometer



7008

3-digit digital potentiometer



7009

10-turn potentiometer, 200 Ω



7010

10-turn potentiometer, 20 k Ω




7011

Dial for 10-turn potentiometer



7012

1-turn potentiometer, 1 k Ω




7014

Shunt resistor 0.5 Ω




7015

1-turn potentiometer, 10 k Ω



7016

1-turn potentiometer, 100 k Ω



7020


Knob for 1-turn potentiometer

**7020A**



Knob for 10-turn potentiometer

**7023**

11-pole relay socket

**7024**

Code ring and code pin

**7028**10-turn potentiometer, 2 k Ω **7029**Shunt resistor 0.2 Ω **7031**

Label sheet with engineering units

**7400**

Pt100 temperature sensor

**7411C**

Pt100 temperature sensor

**7423**

Ceramic socket for Pt100 sensor

**7430B**Pt100 cable sensor, $\varnothing 6 \times 60$ mm**7430C**Pt100 cable sensor, $\varnothing 5 \times 20$ mm**7440**

Thermowell for 7400 Pt100 sensor

**8335**

Splash-proof cover

**8341**

Inductive proximity sensor, NAMUR

**8342**

Inductive proximity sensor, NAMUR

**8343**


Inductive proximity sensor, NPN

**8344**


Inductive proximity sensor, NPN

**8421**

DIN rail fitting

**8501**

Field enclosure



8509

M12 interface cable for 5909 Loop Link



8510

8 unit 4511 Modbus cable



8511

4511 Y-splitter Modbus cable



8513

RJ45 Modbus termination



8514

3 X RJ45 female Y-splitter



8515

RJ45 female to female cable adapter



8516

RJ45 female to female shielded cable adapter



8517

3 x RJ45 female shielded Y-splitter



8550

7501 M20 plug with silicone O-ring for alu enclosure



8550-F

7501 M20 plug with FKM O-ring for alu enclosure



8550-S

7501 M20 plug with silicone O-ring for stainless steel enclosure



8550-SF

7501 M20 plug with FKM O-ring for stainless steel enclosure



8551

7501 1/2NPT plug for alu enclosure



8551-S

7501 1/2NPT plug for stainless steel enclosure



8552

Pipe-mounting bracket for 7501



8555

Display with LOI for 7501



8556

Display without LOI for 7501



8557

Bracket spare part for display and transmitter (for 7501)



8558

Bracket spare part for transmitter only (for 7501)



9400_1

Power rail 15 mm profile



9400_2

Power rail 7.5 mm profile



9402

Extra end covers for power rail



9404

Module stop for rail



POWER RAIL

The data sheet specifies the maximum required power at nominal operating values, e.g. 24 V supply voltage, 60°C ambient temperature, 600 Ω load, and 20 mA output current.

In typical applications, the devices are not running at worst-case conditions, specifically when many devices are located together. For engineering purposes, 70% (P70%) of maximum required power is often used.


3000 power rail

The number* of 3000 devices that can be powered from different power sources is listed in the table below:

	Using a PR converter device as power feed-in	3405 power feed-in	9410 power feed-in
P70%	Up to 21 devices	Up to 131 devices	Up to 210 devices
P100%	Up to 14 devices	Up to 92 devices	Up to 147 devices

The devices can be stacked vertically or horizontally.

* The number of devices is based on the PR 3103 which has the lowest power consumption of the 3000 series power rail devices.

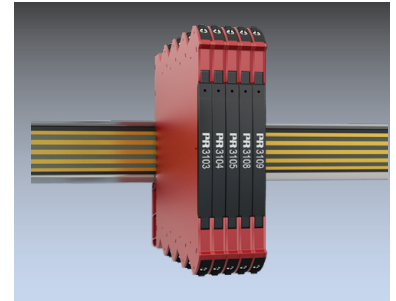

9000 power rail

The number of 9000 devices that can be powered from the 9400 power sources is listed in the table below:

	9410 power feed-in
P70%	Up to 150 devices
P100%	Up to 120 devices



ENVIRONMENTAL SPECIFICATIONS

	PR 2200 series	PR 3000 series	PR 4000 series	PR 5000 series	PR 5300 series
Specifications range	-20°C to +60°C	-25°C to +70°C (3105: 0°C to +70°C)	-20°C to +60°C	-20°C to +60°C	-40°C to +85°C
Relative humidity	< 95% RH (non-cond.)	< 95% RH (non-cond.)	< 95% RH (non-cond.)	< 95% RH (non-cond.)	< 95% RH (non-cond.)
Protection degree	IP50	IP20	IP20	IP20	IP68 / IP00
	PR 5400 series	PR 5500 / 5700 series	PR 6300 series	PR 7500 series	PR 9000 series
Specifications range	-40°C / 50°C to +85°C	-20°C to +60°C	-40°C to +85°C	-20°C / -40°C to +85°C	-20°C to +60°C
Relative humidity	< 99% RH (non-cond.)	< 95% RH (non-cond.)	< 95% RH (non-cond.)	0...100% RH (cond.)	< 95% RH (non-cond.)
Protection degree	IP68 / IP00	IP65 from front (5500) IP65 / Type 4X, UL50E	IP20	IP54 / IP66 / IP68 / type 4X	IP20

ENCLOSURE SPECIFICATIONS

Dimensions (mm)	Height	Width	Depth	Panel cut-out	Material
PR 2200 series	80.5	35.5	84.5+socket		Cycology/Noryl
PR 3000 series	113	6.1	115		Cycology
PR 4000 / 6000 / 9000 series	109	23.5	104		Cycology
PR 4500 series	73.2	23.3	26.5		Cycology
PR 5000 series	109	23.5	130		Cycology
PR 5300 series	20.2	Ø44			Cycology
PR 5400 series	21.45	Ø44			Cycology
PR 5500 / 5700 series	48	96	120	44.5 x 91.5	Noryl
PR 7500 series	109	145	125.5		Aluminum

Benefit today from ***PERFORMANCE MADE SMARTER***

PR electronics is the leading technology company specialized in making industrial process control safer, more reliable and more efficient. Since 1974, we have been dedicated to perfecting our core competence of innovating high precision technology with low power consumption. This dedication continues to set new standards for products communicating, monitoring and connecting our customers' process measurement points to their process control systems.

Our innovative, patented technologies are derived from our expansive R&D facilities and from having a great understanding of our customers' needs and processes. We are guided by principles of simplicity, focus, courage and excellence, enabling some of the world's greatest companies to achieve PERFORMANCE MADE SMARTER.

10ISEN-W23 (2542)

